


## Bend 11°15 (1/32) (PECB) with 2 sockets EXPRESS

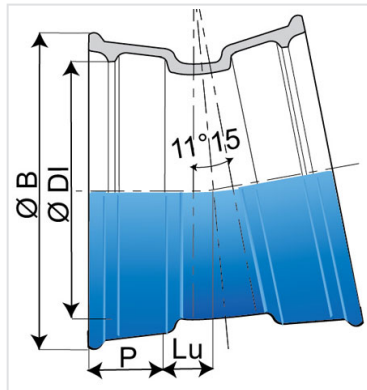

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
11°15	80	40	79	101.4	167.5	5.04	293390
11°15	100	30	80	121.4	187.5	5.60	290771
11°15	150	35	86	173.4	241.5	8.40	291949
11°15	350	50	110	381.9	462	41.06	SEB35CE00TT2
11°15	400	49	110	432.9	514	49.50	SEB40CE00TT2
11°15	450	65	120	484	575.4	67.41	SEB45CE00TT2
11°15	500	60	120	536	627	75.50	SEB50CE00TT2
11°15	600	70	135	639.1	736.3	107.00	SEB60CE00TT2
11°15	700	87	150	742	861	197.00	SEB70CE00TT
11°15	800	90.5	160	846	972	255.00	SEB80CE00TT
11°15	900	102.5	175	949	1080	332.00	SEB90CE00TT
11°15	1000	117.5	145	1052	1189	360.00	SEC10CE00TT


### Field of use:

- For drinking water and irrigation networks
- For aggressive soils (maritime soils, peaty, ...)


## Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009

## Linked products

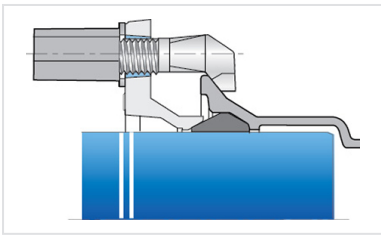

Kit Express Fittings PECB +  
Express Gasket

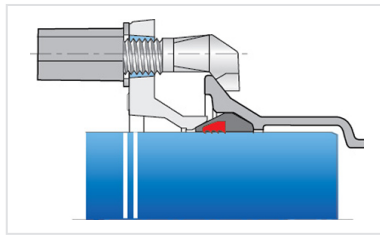

Kit Express Fitting PECB +  
Express Vi Gasket

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*