
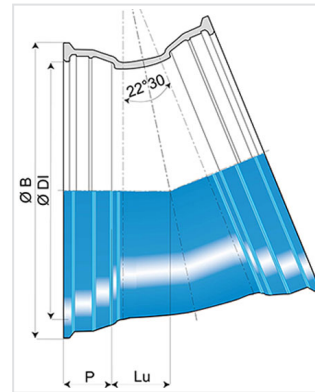


### Bend 22°30 (1/16) (PECB) with 2 sockets STANDARD

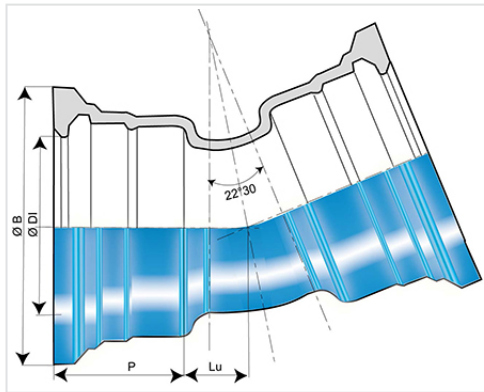

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
22°30	60	30	82	80.2	143.5	4.90	SSA60CD00TT
22°30	80	32	85	101.4	167.5	6.20	SSA80CD00TT
22°30	100	35	88	121.4	187.5	7.80	SSB10CD00TT
22°30	125	38	91	147.4	214.5	9.90	SSB12CD00TT
22°30	150	42	94	173.4	241	12.20	SSB15CD00TT
22°30	200	51	100	225.5	294	18.90	SSB20CD00TT
22°30	250	70	105	277.3	351	32.20	SSB25CD00TT
22°30	300	70	110	329.3	408.3	42.20	SSB30CD00TT
22°30	350	78	110	381.9	464.3	43.79	SSB35CD00TT2
22°30	400	92	112	432.9	515.3	58.00	SSB40CD00TT2
22°30	450	101	115.5	484	573	71.19	SSB45CD00TT2
22°30	500	110	117.5	536	628	96.29	SSB50CD00TT2
22°30	600	128	132.5	639.1	737	138.50	SSB60CD00TT2
22°30	700	157.5	150	742.2	863	230.60	SSB70CD00TT
22°30	800	170.5	160	846.3	974	303.00	SSB80CD00TT
22°30	900	197.5	175	949.4	1082	405.60	SSB90CD00TT
22°30	1000	217.5	185	1052.5	1191	507.00	SSC10CD00TT
22°30	1100	275	190	1155	1300	650.00	SSC11CD00TT
22°30	1200	258.5	195	1263	1412.5	644.00	SSC12CD00TT
22°30	1400	264	255	1467	1600	1107.00	SSC14CD00TT
22°30	1500	314	280	1570	1742	1367.00	SSC15CD00TT
22°30	1600	284	275	1673	1820	1479.00	SSC16CD00TT

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
22°30	1800	337	258	1881.7	2038.2	2070.00	SSC18CD00TT
22°30	2000	355	290	2089	2269	2668.00	SSC20CD00TT


### Field of use:

- For drinking water and irrigation networks
- For aggressive soils (maritime soils, peaty, ...)


### Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009


### Linked products

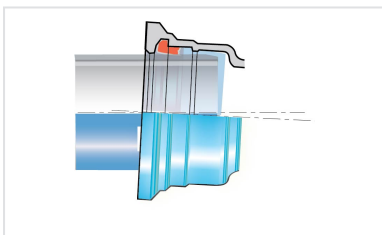


Kit Standard Bend PECB +  
Standard Gasket

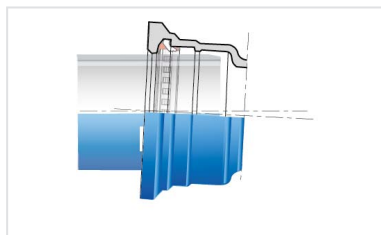

Kit Standard Fitting PECB +  
Standard Vi Gasket

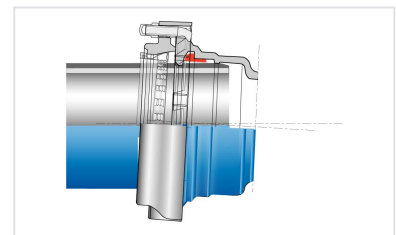

Kit Standard Fitting PECB +  
Standard V+i Joint

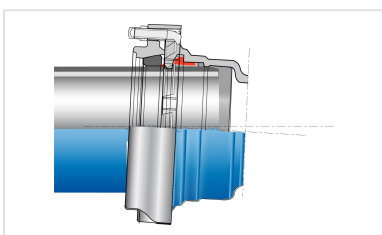

Kit Standard Fitting PECB +  
Standard Ve Joint



# NATURAL SUPPLY, TREATMENT AND DISTRIBUTION DN 60 - 2000

06/06/2026  
WARSF21STD363

---

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*