
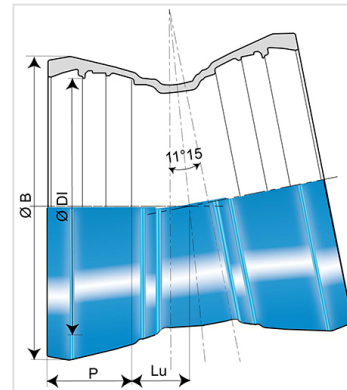


Bend 11°15 (1/32) (PECB) with 2 sockets UNIVERSAL STANDARD

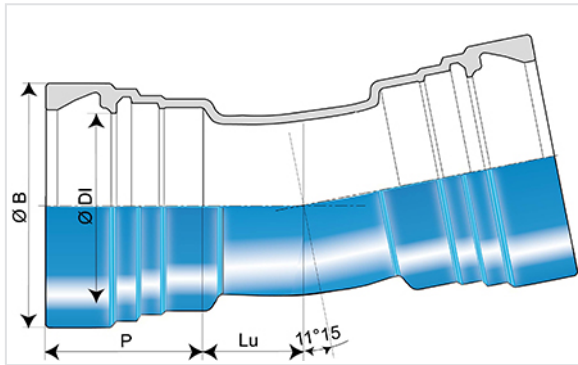

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
11°15	80	30.3	120	101.4	149	14.50	SFA80CE00TT
11°15	100	32.9	142	121.4	177	17.00	SFB10CE00TT
11°15	125	36.1	148	147.4	201.4	16.50	SFB12CE00TT
11°15	150	39.3	150	173.4	230	25.00	SFB15CE00TT
11°15	200	45.7	158	225.5	290	35.90	SFB20CE00TT
11°15	250	52.1	166	276.8	347	48.10	SFB25CE00TT
11°15	300	58.6	178	328.8	406	65.70	SFB30CE00TT
11°15	400	65	176	432	512	87.00	SFB40CE00TT
11°15	500	75	200	535	626	139.00	SFB50CE00TT
11°15	600	85	209	638	742	191.00	SFB60CE00TT
11°15	700	87	256	740.5	857	350.00	SFB70CE00TT
11°15	800	90	261	845.8	983.8	470.00	SFB80CE00TT
11°15	900	120	275	948.9	1093	696.00	SFB90CE00TT
11°15	1000	130	272.5	1052	1216	800.00	SFC10CE00TT
11°15	1200	150	279.5	1260	1419.6	950.00	SFC12CE00TT
11°15	1400	143	330	1468.5	1650.1	1382.00	SFC14CE00TT


Field of use:

- To use under high to very high pressures


Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products

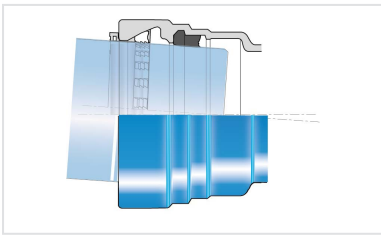

Kit Universal Standard
Fitting PECB + Universal
Standard Vi Joint

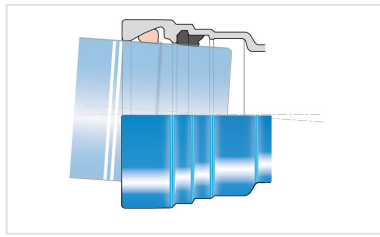

Kit Universal Standard
Fitting PECB + Universal
Standard Ve Joint

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.