
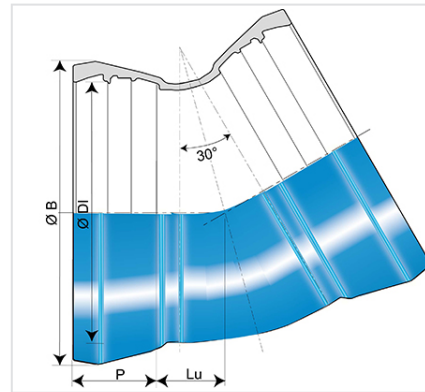


Bend 30° (1/12) (PECB) with 2 sockets UNIVERSAL STANDARD

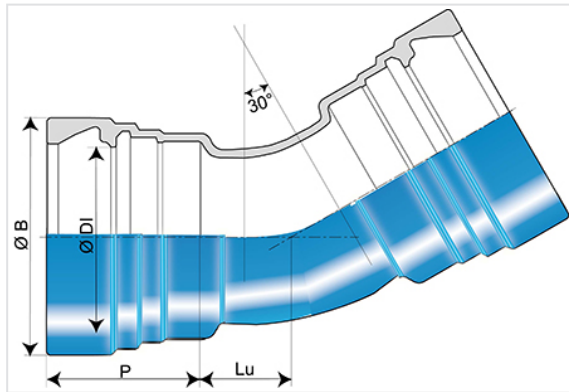

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
30°	200	79.6	158	225.5	290	38.60	SFB20CC00TT
30°	250	94.5	166	276.8	347	51.30	SFB25CC00TT
30°	300	109.4	178	328.8	406	75.00	SFB30CC00TT
30°	400	140	176	432	512	102.00	SFB40CC00TT
30°	500	170	200	535	626	164.00	SFB50CC00TT
30°	600	200	209	638	742	234.30	SFB60CC00TT


Field of use:

- To use under high to very high pressures


Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products

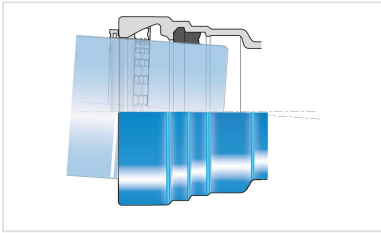

Kit Universal Standard
Fitting PECB + Universal
Standard Vi Joint

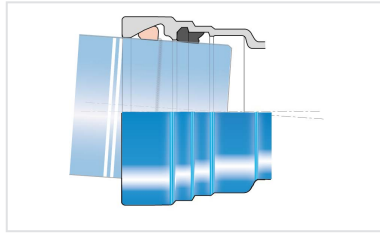

Kit Universal Standard
Fitting PECB + Universal
Standard Ve Joint

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.