


Bend 45° (1/8) (PECB) with 2 sockets STANDARD PAMLOCK

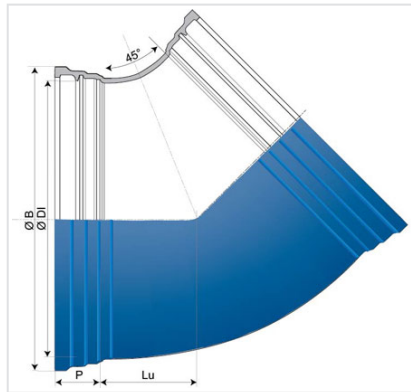

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
45°	1400	522	300	1467.1	1633.7	1603.00	SPC14CB00TT
45°	1500	655	322	1570.3	1759.3	2240.00	SPC15CB00TT
45°	1600	563	325	1673.4	1870.4	2390.00	SPC16CB00TT
45°	1800	730	350	1880.7	2075.3	3672.00	SPC18CB00TT
45°	2000	748	394	2088	2313	4152.00	SPC20CB00TT


Field of use:

- For drinking water and irrigation networks

Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products

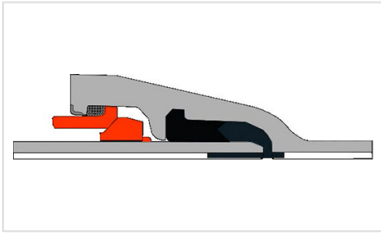

Kit PAMLOCK Fitting PECB +
PAMLOCK Joint

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.