


## Bend 11°15 (1/32) (PECB) with 2 sockets STANDARD PAMLOCK

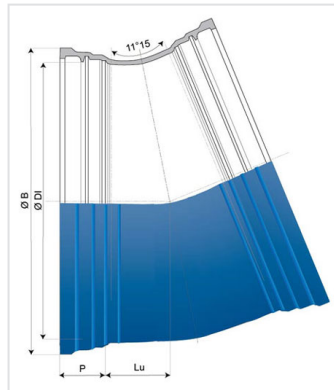

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
11°15	1400	143	300	1467.1	1633.7	932.00	SPC14CE00TT
11°15	1500	276	322	1570.3	1759.3	1400.00	SPC15CE00TT
11°15	1600	153	325	1673.4	1870.4	1399.00	SPC16CE00TT
11°15	2000	265	394	2088	2313	2815.00	SPC20CE00TT


### Field of use:

- For drinking water and irrigation networks

### Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009

### Linked products

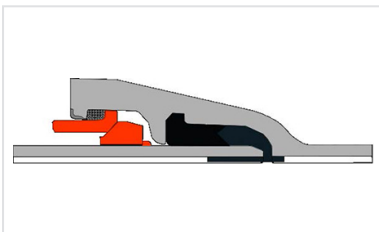

Kit PAMLOCK Fitting PECB +  
PAMLOCK Joint



# NATURAL SUPPLY, TREATMENT AND DISTRIBUTION DN 1400 - 2000

06/06/2026  
WARSF22PMK388

---

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*