
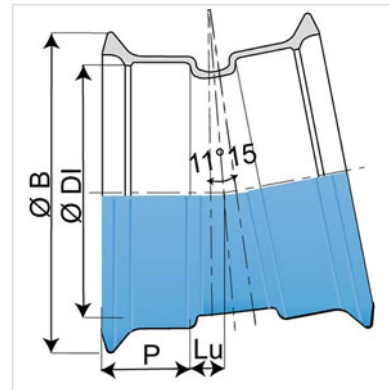


### Bend 11°15 (1/32) NATURAL with 2 sockets EXPRESS

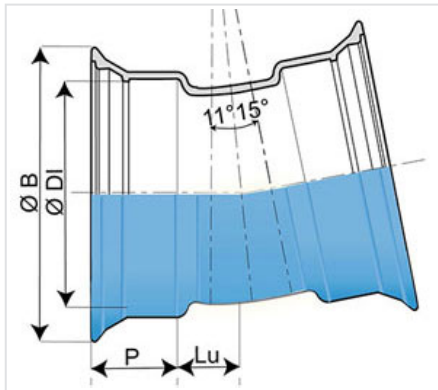

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
11°15	60	35	76	80.3	143.5	5.70	NEA60CE00NN2
11°15	80	40	79	111.4	167.5	7.60	NEA80CE00NN2
11°15	100	30	80	121.4	187.5	5.30	NEB10CE00NN2
11°15	125	35	83	147.4	214.5	6.60	NEB12CE00NN2
11°15	150	35	86	173.4	241.5	8.00	NEB15CE00NN2
11°15	200	40	92	225.5	294.5	11.60	NEB20CE00NN2
11°15	250	50	100	276.8	351	20.80	NEB25CE00NN2
11°15	300	55	105	328.8	408.2	26.60	NEB30CE00NN2


#### Field of use:

- For drinking water networks
- The scope of use of Aquacoat® fittings in soils is equivalent to that of Natural Biozinalium® pipes, it is suitable for the majority of soils, as defined in appendix D.2.2 of standard EN545:2010. exception :
  - peaty and acidic soils
  - soils containing waste, ashes, slag or contaminated by certain waste or industrial effluents
  - soils located below the level of the marine water table having a resistivity less than 500 Ω cm
- In such soils, or in other aggressive environments, or in the event of stray currents, it is recommended to use other, more suitable types of coatings.


## Main characteristics:

- Inside-Outside coating: Aquacoat fittings (AQB) without Bisphenol
- In conformity with EN 545:2010 and ISO 2531:2009

## Linked products

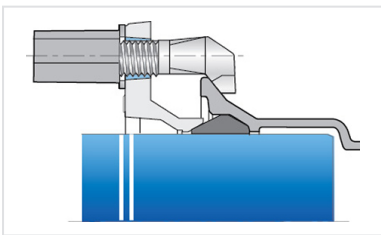

Kit Express Fittings AQB +  
Express Gasket

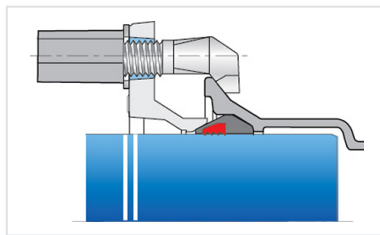

Kit Express Fitting AQB +  
Express Vi Gasket

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*