


## Bend 22°30 (1/16) NATURAL with 2 sockets STANDARD

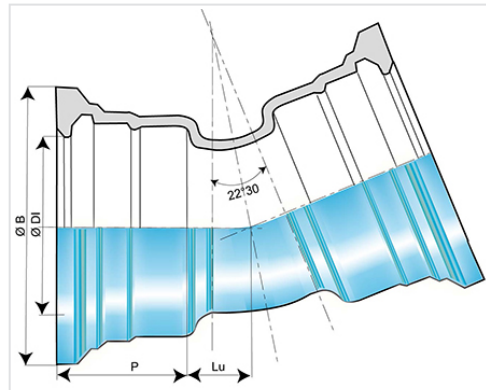

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
22°30	60	30	82	80.2	143.5	4.90	NSA60CD00NN2
22°30	80	32	85	101.4	167.5	6.20	NSA80CD00NN2
22°30	100	35	88	121.4	187.5	7.80	NSB10CD00NN2
22°30	125	38	91	147.4	214.5	9.90	NSB12CD00NN2
22°30	150	42	94	173.4	241	12.20	NSB15CD00NN2
22°30	200	51	100	225.5	294	19.00	NSB20CD00NN2
22°30	250	70	105	277.3	351	32.20	NSB25CD00NN2
22°30	300	70	110	329.3	408.3	42.20	NSB30CD00NN2

### Field of use:

- For drinking water networks
- The scope of use of Aquacoat® fittings in soils is equivalent to that of Natural Biozinalium® pipes, it is suitable for the majority of soils, as defined in appendix D.2.2 of standard EN545:2010. exception :
  - peaty and acidic soils
  - soils containing waste, ashes, slag or contaminated by certain waste or industrial effluents
  - soils located below the level of the marine water table having a resistivity less than 500 Ω cm
- In such soils, or in other aggressive environments, or in the event of stray currents, it is recommended to use other, more suitable types of coatings.

## Main characteristics:

- Inside-Outside coating: Aquacoat fittings (AQB) without Bisphenol
- In conformity with EN 545:2010 and ISO 2531:2009

## Linked products



Kit Standard Bend AQB +  
Standard Gasket



Kit Standard Fitting AQB +  
Standard Vi Gasket



Kit Standard Fitting AQB +  
Standard Ve Joint

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*