


Tee NATURAL with 3 sockets STANDARD

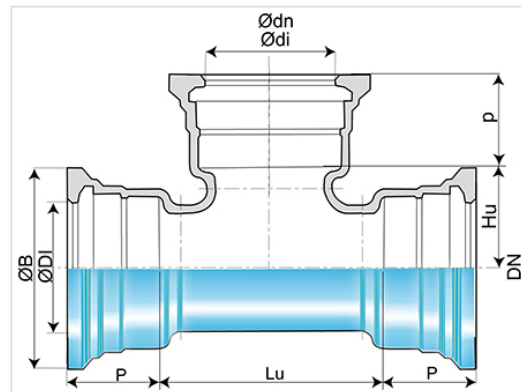

DN (mm)	Ødn (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Hu (mm)	p (mm)	Ødi (mm)	Mass (kg)	References
60	60	154	82	80.2	143.5	77	82	80.2	8.70	NSA60TE0CNN2
80	80	183	85	101.4	167.5	91.5	85	101.4	11.20	NSA80TE0ENN2
100	100	210	88	121.4	187.5	105	88	121.4	14.90	NSB10TE0FNN2
125	80	165	91	147.4	214.5	121.5	85	101.4	15.50	NSB12TE0ENN2
125	100	190	91	147.4	214.5	125	88	121.4	16.90	NSB12TE0FNN2
125	125	267	91	147.4	214.5	133.5	91	147.4	21.00	NSB12TE0GNN2
150	80	165	94	173.4	241	136.5	85	101.4	18.20	NSB15TE0ENN2
150	100	190	94	173.4	241	140	88	121.4	19.80	NSB15TE0FNN2
150	150	305	94	173.4	241	152.5	94	173.4	27.00	NSB15TE0JNN2
200	100	195	100	225.5	294	170	88	121.4	27.50	NSB20TE0FNN2
200	125	220	100	225.5	294	173.5	91	147.4	29.70	NSB20TE0GNN2
200	150	250	100	225.5	294	177.5	94	173.4	32.30	NSB20TE0JNN2
200	200	360	100	225.5	294	180	100	225.5	40.70	NSB20TE0KNN2
250	80	234	105	277.3	351	182.5	85	101.4	30.60	NSB25TE0ENN2
250	100	175	105	277.8	351	245	88	122.4	32.30	NSB25TE0FNN2
250	150	235	105	277.8	351	255	94	174.4	36.90	NSB25TE0JNN2
250	200	290	105	277.8	351	155	100	226.2	42.00	NSB25TE0KNN2
250	250	350	105	277.8	351	165	105	277.8	49.70	NSB25TE0LNN2
300	100	180	110	329.8	408.3	170	88	122.4	41.00	NSB30TE0FNN2
300	150	235	110	329.8	408.3	175	94	174.4	46.00	NSB30TE0JNN2
300	200	295	110	329.8	408.3	180	100	226.2	52.10	NSB30TE0KNN2
300	250	350	110	329.8	408.3	185	105	277.8	60.40	NSB30TE0LNN2

DN (mm)	Ødn (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Hu (mm)	p (mm)	Ødi (mm)	Mass (kg)	References
300	300	410	110	329.8	408.3	195	110	329.8	69.00	NSB30TE0MNN2


Field of use:

- For drinking water networks
- The scope of use of Aquacoat® fittings in soils is equivalent to that of Natural Biozinalium® pipes, it is suitable for the majority of soils, as defined in appendix D.2.2 of standard EN545:2010. exception :
 - peaty and acidic soils
 - soils containing waste, ashes, slag or contaminated by certain waste or industrial effluents
 - soils located below the level of the marine water table having a resistivity less than 500 Ω cm
- In such soils, or in other aggressive environments, or in the event of stray currents, it is recommended to use other, more suitable types of coatings.


Main characteristics:

- Inside-Outside coating: Aquacoat fittings (AQB) without Bisphenol
- In conformity with EN 545:2010 and ISO 2531:2009


Linked products

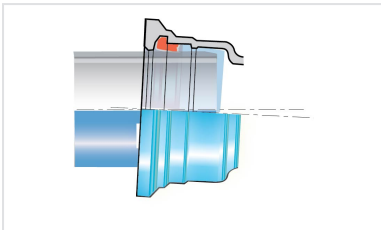

Kit Standard All Socket Tee
 AQB + Standard Gasket

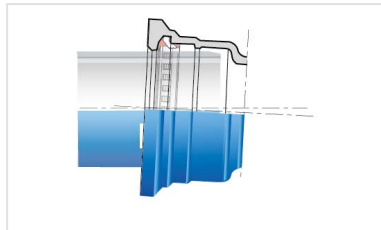

Kit Standard Fitting AQB +
 Standard Vi Gasket

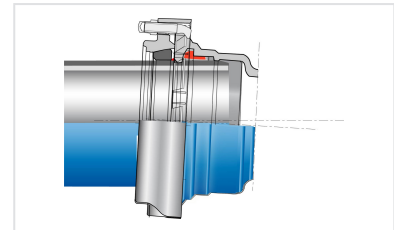

Kit Standard Fitting AQB +
 Standard Ve Joint

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.