


TT PUX pipes DN700 to 1600 with UNIVERSAL STANDARD socket + Weld bead Ve

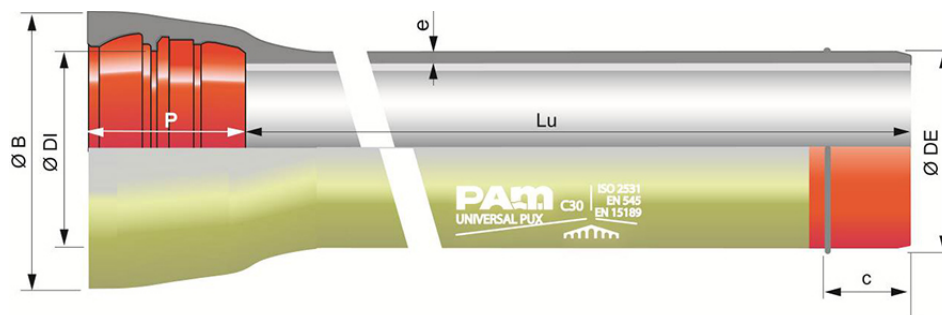

DN	Lu (m)	Class	e (mm)	ØDE (mm)	ØDI (mm)	P (mm)	ØB (mm)	Bead position c (mm)	Mass (kg)	References
700	6.90	C30	10.8	738	741.7	250	855	158	227.00	SFB70G70AH
800	6.90	C30	11.7	842	845.8	261	980	150	281.90	SFB80N70AH
900	6.90	C30	12.6	945	948.9	280	1087	155	348.70	SFB90N70AH
1000	6.90	C30	13.5	1048	1052	279.5	1191	165	403.20	SFC10N70AH
1100	8.13	C30	14.7	1152	1168	284	1317.8	165	467.30	SFC11G80AH
1200	8.15	C25	15.3	1255	1260	279.5	1415	170	521.40	SFC12N80AH
1200	8.15	C30	16.5	1255	1260	279.5	1415	170	560.00	SFC12G80AH
1400	8.09	C25	17.1	1462	1468.5	330	1640.1	190	713.10	SFC14H80AH
1600	8.09	C25	17.7	1668	1674.2	330	1874	195	858.10	SFC16H80AH

Legend:

- DN: nominal diameter
- Lu: laying length, in m
- Class: pressure class according to EN 545 and ISO 2531
- e: nominal thickness according to ISO 2531, in mm
- ØDE: external nominal diameter of the barrel according to EN 545 and ISO 2531, in mm
- ØDI: internal nominal diameter of the socket, in mm
- P: nominal depth of the socket, in mm
- ØB: nominal diameter of the socket, in mm
- c: weld bead position, in mm
- Mass: total mass per metre (including cement coating and socket), determined with the nominal thickness, in kg/m
- Reference: commercial reference Saint-Gobain PAM


Field of use:

- For drinking water networks and other water networks (except sewage water)
- For high corrosive soils, industrial pollution zones


Main characteristics:

- Pressure class in conformity with Standard EN 545-2010 and ISO 2531-2009
- External coating: polyurethane coating (900 microns) on the barrel, red-brown epoxy (300 microns) on spigot end and inside socket - conformity to EN 14901 and EN 15189
- Internal coating: sulfate resisting blast furnace cement mortar
- Standard joint in alimentary elastomer EPDM (ACS, KTW, WRAS,...)


Accessories

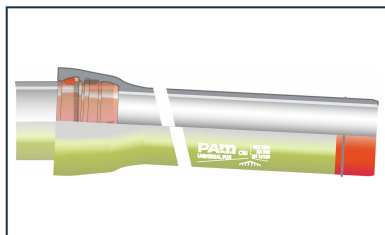


Kit Universal Standard Ve
PUX Pipe + Universal
Standard Ve Joint

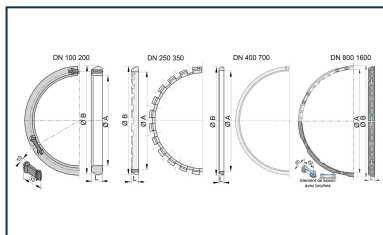

UNI STD Ve joint for
Pipes and Fittings
DN80-1600

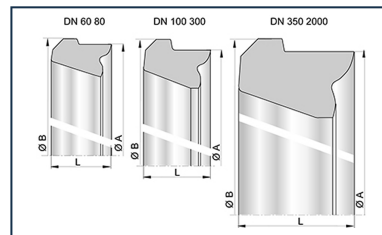

Standard gasket for Pipes
and Fittings DN60-2000

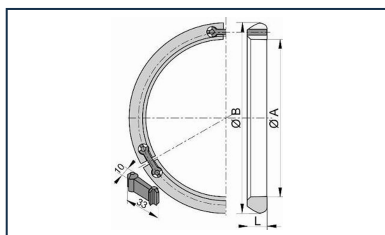

Locking Ring for UNI Ve
joint DN80-1800

Linked products



Lubricating paste -
BLUPAM



Lubricating paste -
NATURAL, INTEGRAL,
and PLUVIAL ranges

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.