


TT PUX pipes DN700 to 1000 C25 with UNIVERSAL STANDARD socket + Weld bead Ve

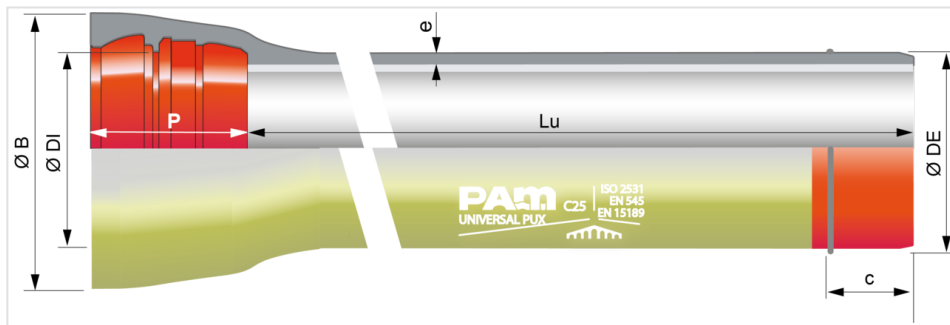

| DN | Lu (m) | Class | e (mm) | ØDE (mm) | ØDI (mm) | P (mm) | ØB (mm) | Bead position c (mm) | Mass (kg/m) | References |
|------|--------|-------|--------|----------|----------|--------|---------|----------------------|-------------|------------|
| 700 | 6.90 | C25 | 8.8 | 738 | 741.7 | 250 | 855 | 158 | 194.19 | * |
| 800 | 6.90 | C25 | 9.6 | 842 | 845.8 | 261 | 980 | 150 | 240.59 | * |
| 900 | 6.90 | C25 | 10.6 | 945 | 948.9 | 280 | 1087 | 155 | 298.54 | SFB90H70AH |
| 1000 | 6.90 | C25 | 11.6 | 1048 | 1052 | 279.5 | 1191 | 165 | 353.80 | SFC10H70AH |

(*) Consult us

Legend:

- DN: nominal diameter
- Lu: laying length, in m
- Class: pressure class according to EN 545 and ISO 2531
- e: nominal thickness according to ISO 2531, in mm
- ØDE: external nominal diameter of the barrel according to EN 545 and ISO 2531, in mm
- ØDI: internal nominal diameter of the socket, in mm
- P: nominal depth of the socket, in mm
- ØB: nominal diameter of the socket, in mm
- c: weld bead position, in mm
- Mass: total mass per metre (including cement coating and socket), determined with the nominal thickness, in kg/m
- Reference: commercial reference Saint-Gobain PAM


Field of use:

- For drinking water networks and other water networks (except sewage water)
- For high corrosive soils, industrial pollution zones


Main characteristics:

- Pressure class in conformity with Standard EN 545-2010 and ISO 2531-2009
- External coating: polyurethane coating (900 microns) on the barrel, red-brown epoxy (300 microns) on spigot end and inside socket - conformity to EN 14901 and EN 15189
- Internal coating: sulfate resisting blast furnace cement mortar
- Standard joint in alimentary elastomer EPDM (ACS, KTW, WRAS,...)


Linked products

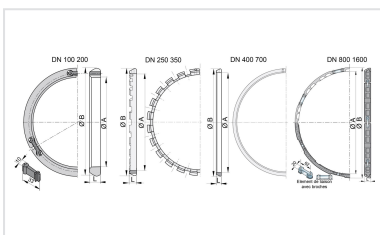

UNI STD Ve joint for Pipes and Fittings DN80-1600

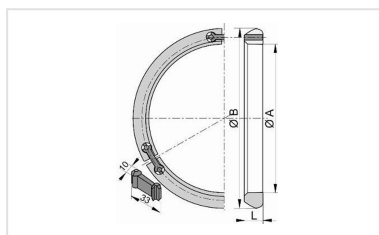

Locking Ring for UNI Ve joint DN80-1800

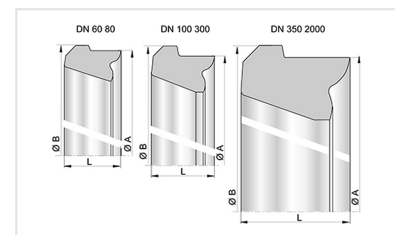

Standard gasket for Pipes and Fittings DN60-2000



Lubricating paste - BLUPAM



Lubricating paste - NATURAL, INTEGRAL, and PLUVIAL ranges

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.