


## Bend 22°30 (1/16) ISOPAM with 2 sockets STANDARD

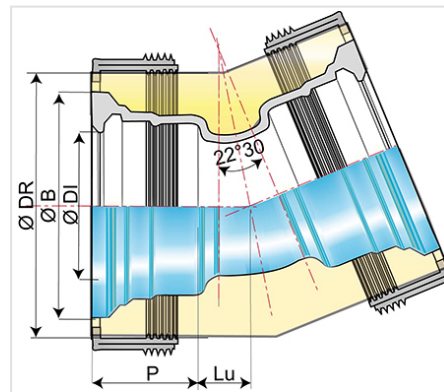

| Angle | DN (mm) | Lu (mm) | P (mm) | ØDI (mm) | ØB (mm) | ØDR (mm) | Mass (kg) | References |
|-------|---------|---------|--------|----------|---------|----------|-----------|------------|
| 22°30 | 100     | 35      | 88     | 121.4    | 187.5   | 200      | 11.60     | YSB10CD    |
| 22°30 | 125     | 38      | 91     | 147.4    | 214.5   | 225      | 14.70     | YSB12CD    |
| 22°30 | 150     | 42      | 94     | 173.4    | 241     | 250      | 17.55     | YSB15CD    |
| 22°30 | 200     | 51      | 100    | 225.5    | 294     | 315      | 31.60     | YSB20CD    |
| 22°30 | 300     | 70      | 110    | 329.3    | 408.3   | 450      | 55.10     | YSB30CD    |


### Field of use:

- Pre-insulated fittings for frost protection


### Main characteristics:

- Inside-Outside coating: Aquacoat fittings (AQB)
- EN 545
- Fittings equipped with thermal insulation (polyethylene sleeve, polyurethane foam, foam spacer, elastomer sleeve) to protect networks exposed to risks of freezing

## Linked products

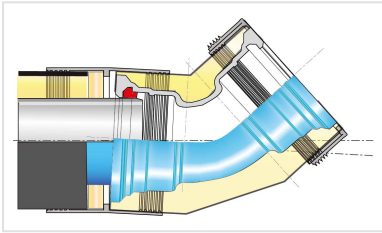

Kit ISOPAM Fitting +  
Standard Gasket

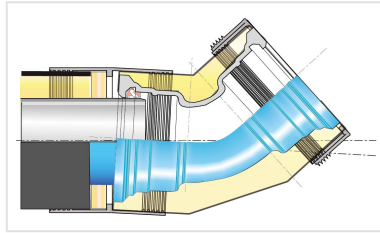

Kit ISOPAM Fitting +  
Standard Vi Gasket

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*