


## Semi-sliding Collar IZIFIT with embossing for drilling

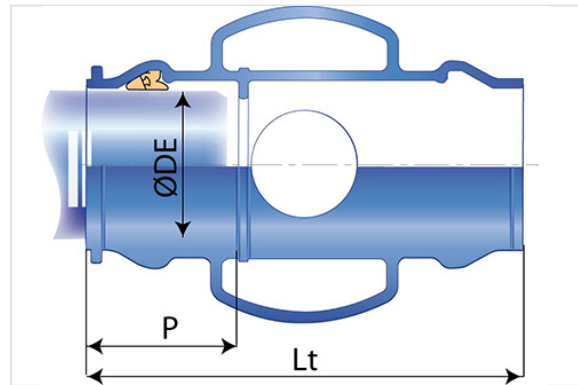

Embossing adapted and planned for:

- "Metric drilling" M40X3 or M55X3 - Collar delivered without drilling
- "Gas drilling" ¾", 1", 1 ¼", 1 ½", 2" - Collar delivered without drilling

DN/OD (mm)	ØDE (mm)	P (mm)	Lt (mm)	Mass (kg)	References
75	75	87	254	5.30	KTL75MM
110	110	99	275	7.30	KTM11MM


### Field of use:

- For drinking water supply networks and connection with plastics piping systems for water transport under pressure in PVC-U, PE or PVC-BO
- All the constituent materials have "Attestation de Conformité Sanitaire" in France (ACS), WRAS and DWI agreements in UK, DVGW agreement in Germany


### Main characteristics:

- Internal and external coating: blue epoxy powder (thickness 250 microns) according to EN 14901-1
- Joints in EPDM according to EN 681-1
- For transport and storage, the joints are protected by plugs
- Conformity to EN12842: ductile iron fittings for PVC-U or PE piping systems
- Conformity to ISO 16631-2016: ductile iron fittings for PVC-U or PE piping systems
- Conformity to NF T 54-948: plastics piping systems for water transport under pressure - pipes made of biaxial oriented poly(vinyl chloride) (PVC-BO)

## Linked products

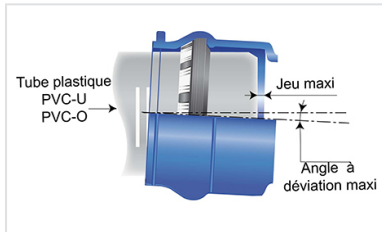

IZIFIT Joint for plastics piping systems

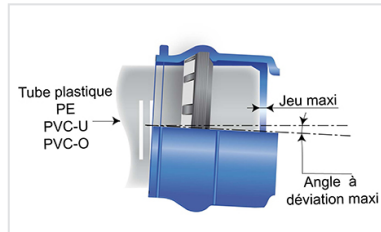

IZIFIT anchored Vi Joint for plastics piping systems

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*