


## Flange Spigot IZIFIT-K and Fixed Flange

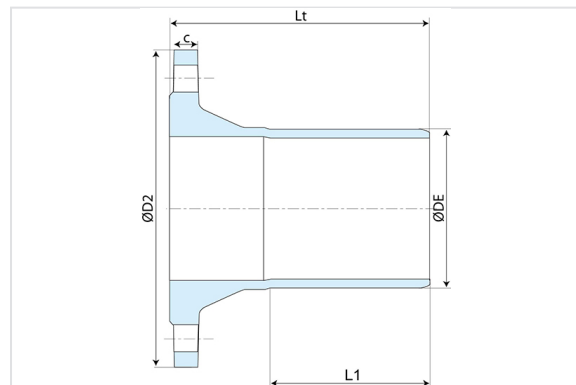

DN/OD (mm)	ØDE (mm)	DN flange	PN	L1 (mm)	Lt (mm)	ØD2 (mm)	c (mm)	Mass (kg)	References
63	63	60 mm	10 16	93	153	175	18.5	3.62	KZL63BU1C
140	140	125 mm	10 16	119	190	250	20.5	8.56	KZM14BU1G
160	160	150 mm	10 16	127	197	285	22.5	10.64	KZM16BU1J

for flange DN65: DE 63 → KZL63BU1D - DE 75 → KZL75BU1D

### Field of use:

- Jointing of PVC-U pipes
- For potable water networks

### Main characteristics:

- EN 12842
- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- IZIFIT-K fittings are supplied with pre-fitted gaskets protected by caps
- Elastomer quality : EPDM (EN 681-1)

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*