


IZIFIT-K anchored Vi Joint for plastics piping systems

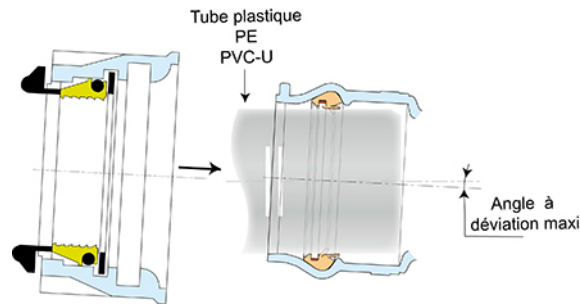

Field of use:

- Joining of PE or PVC-U pipes
- For potable water networks

Main characteristics:

- EN 12842
- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- IZIFIT-K fittings are supplied with pre-fitted gaskets protected by caps
- Elastomer quality : EPDM (EN 681-1)

DN/OD	Angular deflection
mm	degree
63	3
140	3
160	3
200	3
225	3

Allowable operating pressure (PFA)

	PN10	PN16
PVC-U	PFA 10	PFA 16
PE	PFA 10	PFA 16

(*) with anchoring Gland

Linked products



IZIFIT-K anchoring Gland

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.