


Flange Socket IZIFIT-K and Fixed Flange

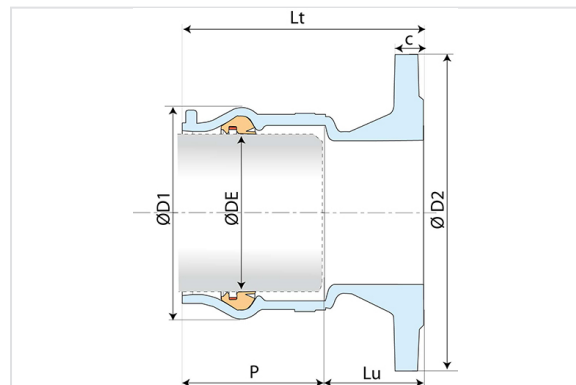

DN/OD (mm)	ØDE (mm)	DN flange	PN	ØD1 (mm)	P (mm)	Lu (mm)	Lt (mm)	ØD2 (mm)	c (mm)	Mass (kg)	References
63	63	60 mm	10 16	96	83	57	140	175	18.5	3.88	KZL63BE1C
140	140	125 mm	10 16	177	108	68	176	250	20.5	9.15	KZM14BE1G
160	160	150 mm	10 16	199	114	68	182	285	22.5	11.22	KZM16BE1J
200	200	200 mm	10	243	127	72	199	340	22.5	15.18	KZM20BE1K
200	200	200 mm	16	243	127	72	199	340	22.5	15.18	KZM20BE2K
225	225	200 mm	10	271	135	75	210	340	22.5	16.38	KZM22BE1K
225	225	200 mm	16	271	135	75	210	340	22.5	16.38	KZM22BE2K

for flange DN65: DE 63 → KZL63BE1D - DE 75 → KZL75BE1D


Field of use:

- Jointing of PVC-U pipes
- For potable water networks


Main characteristics:

- EN 12842
- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- IZIFIT-K fittings are supplied with pre-fitted gaskets protected by caps
- Elastomer quality : EPDM (EN 681-1)

Linked products

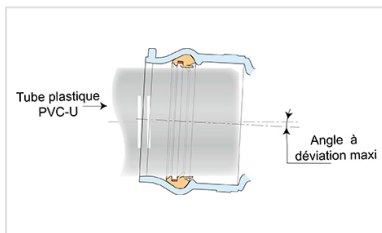

IZIFIT-K Joint for plastics piping systems

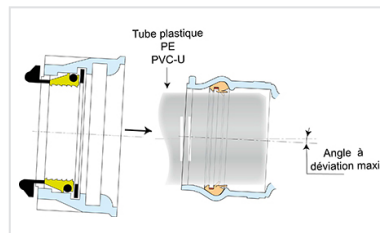

IZIFIT-K anchored Vi Joint for plastics piping systems

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.