


Bend 45° (1/8) IZIFIT-K with 2 sockets

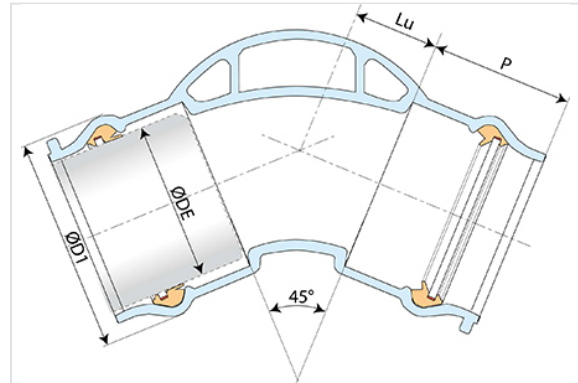

Angle	DN/OD (mm)	ØDE (mm)	ØD1 (mm)	P (mm)	Lu (mm)	Mass (kg)	References
45°	63	63	96	83	40	3.07	KZL63CB
45°	140	140	177	109	70	8.65	KZM14CB
45°	160	160	199	114	70	10.10	KZM16CB
45°	200	200	243	128	70	13.26	KZM20CB
45°	225	225	271	135	80	16.01	KZM22CB


Field of use:

- Joining of PVC-U pipes
- For potable water networks


Main characteristics:

- EN 12842
- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- IZIFIT-K fittings are supplied with pre-fitted gaskets protected by caps
- Elastomer quality : EPDM (EN 681-1)

Linked products

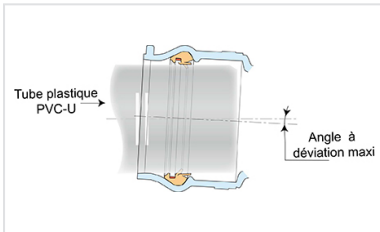

IZIFIT-K Joint for plastics piping systems

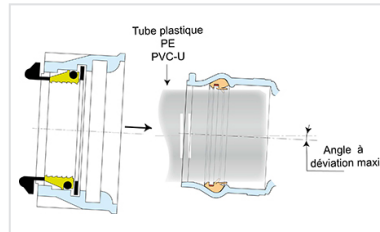

IZIFIT-K anchored Vi Joint for plastics piping systems

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.