


## Bend 22°30 (1/16) IZIFIT-K with 2 sockets

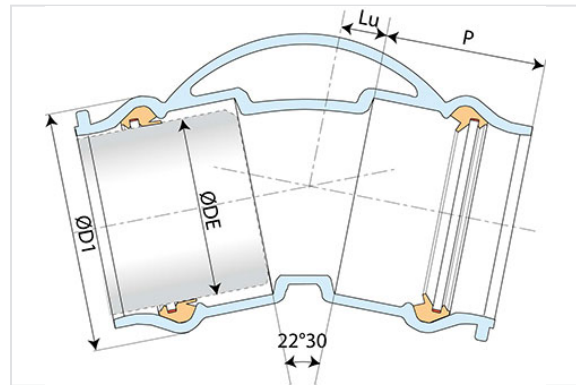

Angle	DN/OD (mm)	ØDE (mm)	ØD1 (mm)	P (mm)	Lu (mm)	Mass (kg)	References
22°30	63	63	96	83	20	2.57	KZL63CD
22°30	140	140	177	108.5	30	6.97	KZM14CD
22°30	160	160	199	114	35	8.44	KZM16CD
22°30	200	200	243	128	40	11.42	KZM20CD
22°30	225	225	271	135	45	13.67	KZM22CD


### Field of use:

- Joining of PVC-U pipes
- For potable water networks


### Main characteristics:

- EN 12842
- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- IZIFIT-K fittings are supplied with pre-fitted gaskets protected by caps
- Elastomer quality : EPDM (EN 681-1)

## Linked products

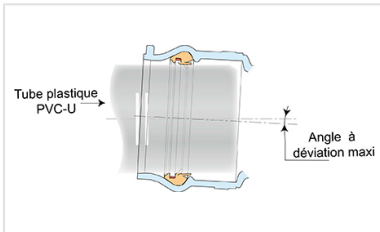

IZIFIT-K Joint for plastics piping systems

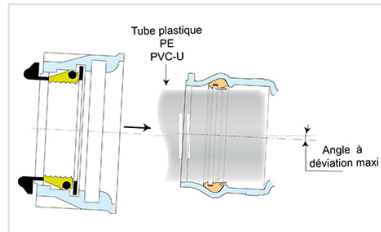

IZIFIT-K anchored Vi Joint for plastics piping systems

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*