


## IZIFIT-K anchoring Gland



DN/OD (mm)	ØDE (mm)	ØD1 (mm)	Lt (mm)	Mass (kg)	References
63	63	118	65	1.56	JZL63VXNN2
140	140	195	70	2.80	JZM14VXNN2
160	160	215	70	3.10	JZM16VXNN2
200	200	257	80	4.18	JZM20VXNN2
225	225	288	78	4.64	JZM22VXNN2

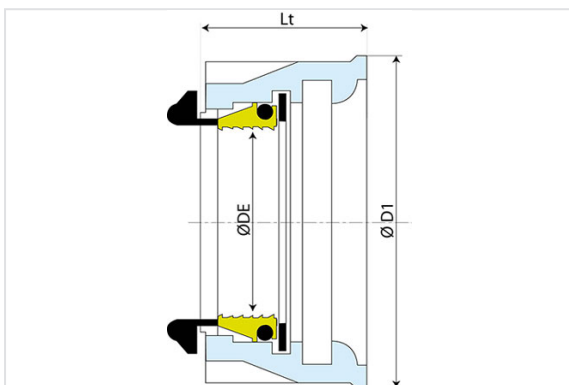


### Field of use:

- Jointing of PE or PVC-U pipes
- For potable water networks
- Self-anchored part of the main without welding or bolts

### Main characteristics:

- EN 12842
- Internal and external coating : Aquacoat fittings (AQB)

### Material and coating

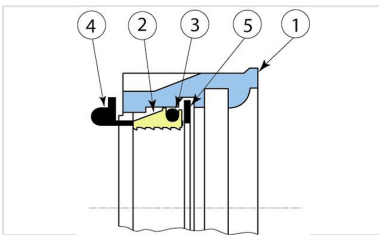

Item	Designation	Material	Coatings
1	Body	Ductile Iron	Aquacoat fittings (AQB)
2	Locking ring DN63 to 160 mm	CUZn40	
	Locking ring DN200 to 225 mm	100 C 6 Nickel or 16 MnCr5 Nickel	
3	Elastomer Gasket	NBR	
4	Wedge	Nylon PA 6.6 or POM	
5	Cale clip	Nylon PA 6.6 or POM	

[Laying procedure DN63-200](#)

[Laying procedure DN225](#)

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*