


Kit Standard Pipe with notches + Standard SUREJOINT (CONTROL+) Gasket



DN (mm)	Class	Angular deflection	PFA	References
150	C40	5 °	40 bar	NSB15Q60AQV-E07
150	C64	5 °	64 bar	NSB15C60AQV-E07
200	C40	5 °	40 bar	NSB20Q60AQV-E07
200	C50	5 °	50 bar	NSB20D60AQV-E07
250	C40	5 °	40 bar	NSB25Q60AQV-E07
250	C50	5 °	50 bar	NSB25D60AQV-E07
300	C40	5 °	40 bar	NSB30F60AQV-E07
300	C50	5 °	50 bar	NSB30D60AQV-E07
350	C30	4 °	30 bar	NSB35G60AQV-E07
350	C40	4 °	40 bar	NSB35F60AQV-E07
400	C30	4 °	30 bar	NSB40G60AQV-E07
400	C40	4 °	40 bar	NSB40F60AQV-E07
450	C30	4 °	30 bar	NSB45G60AQV-E07
450	C40	4 °	40 bar	NSB45F60AQV-E07
500	C30	4 °	30 bar	NSB50G60AQV-E07
500	C40	4 °	40 bar	NSB50F60AQV-E07
600	C30	4 °	30 bar	NSB60G60AQV-E07
600	C40	4 °	40 bar	NSB60F60AQV-E07
800	C25	4 °	25 bar	NSB80H70AQV-E07

Linked products

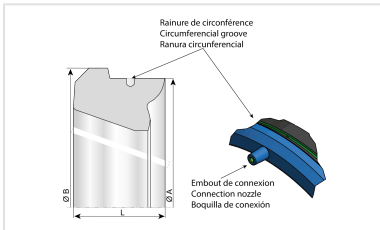

Gasket STANDARD rubber
water EPDM SUREJOINT
(CONTROL+) equipped with
valve

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.