


Kit Standard Pipe with notches + Standard Vi Gasket



| DN | Class | Angular deflection | PFA | References |
|--------|-------|--------------------|--------|-----------------|
| 150 mm | C64 | 5 ° | 25 bar | NSB15C60AQV-E06 |
| 200 mm | C50 | 4 ° | 20 bar | NSB20D60AQV-E06 |
| 250 mm | C50 | 4 ° | 20 bar | NSB25D60AQV-E06 |
| 300 mm | C50 | 3 ° | 20 bar | NSB30D60AQV-E06 |
| 350 mm | C40 | 3 ° | 20 bar | NSB35F60AQV-E06 |
| 400 mm | C40 | 2 ° | 20 bar | NSB40F60AQV-E06 |
| 450 mm | C40 | 2 ° | 20 bar | NSB45F60AQV-E06 |
| 500 mm | C40 | 2 ° | 18 bar | NSB50F60AQV-E06 |
| 600 mm | C40 | 2 ° | 16 bar | NSB60F60AQV-E06 |
| 150 mm | C40 | 5 ° | 16 bar | NSB15Q60AQV-E06 |
| 200 mm | C40 | 4 ° | 16 bar | NSB20Q60AQV-E06 |
| 250 mm | C40 | 4 ° | 16 bar | NSB25Q60AQV-E06 |
| 300 mm | C40 | 3 ° | 16 bar | NSB30F60AQV-E06 |
| 350 mm | C30 | 3 ° | 16 bar | NSB35G60AQV-E06 |
| 400 mm | C30 | 2 ° | 16 bar | NSB40G60AQV-E06 |
| 450 mm | C30 | 2 ° | 13 bar | NSB45G60AQV-E06 |
| 500 mm | C30 | 2 ° | 11 bar | NSB50G60AQV-E06 |
| 600 mm | C30 | 2 ° | 10 bar | NSB60G60AQV-E06 |

Accessories

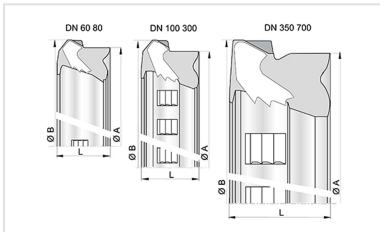

STD Vi gasket for Pipes and Fittings DN60-700

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.