


Bend 22°30 (1/16) PUR PUX with 2 sockets STANDARD

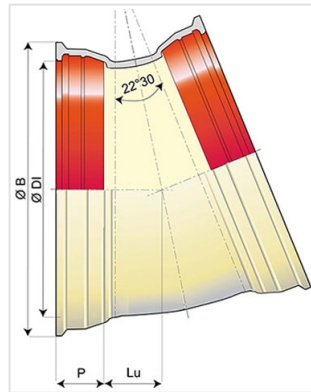

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
22°30	1200	258.5	195	1263	1412.5	644.00	SSC12CD00UU
22°30	1600	284	275	1673	1820	1479.00	SSC16CD00UU


Field of use:

- Aggressive or soft waters
- For high corrosive soils, industrial pollution zones

Main characteristics:

- Internal-external coating: polyurethane coating in accordance with Standard EN 15655 (red epoxy coating inside the socket)
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products

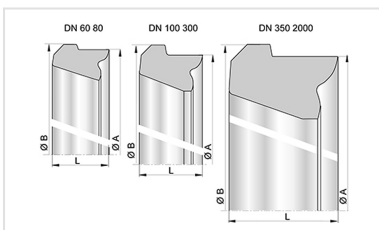

Standard gasket for Pipes
 and Fittings DN60-2000



PUR-PUX
AGGRESSIVE WATERS AND SOILS
DN 1200 - 1600

06/06/2026
WPXSF63STD302

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.