


## Flange Socket PUR PUX with socket STANDARD and Fixed Flange

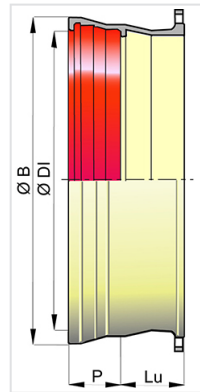

DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	PN 10 Mass (kg)	References
1200	240	195	1263	1412	443.00	SSC12BE10UU


### Field of use:

- Aggressive or soft waters
- For high corrosive soils, industrial pollution zones

### Main characteristics:

- Internal-external coating: polyurethane coating in accordance with Standard EN 15655 (red epoxy coating inside the socket)
- In conformity with EN 545:2010 and ISO 2531:2009

### Linked products

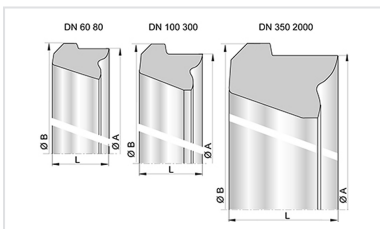

Standard gasket for Pipes  
 and Fittings DN60-2000

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*