


PUR PUX pipes DN150 to 2000 with STANDARD socket

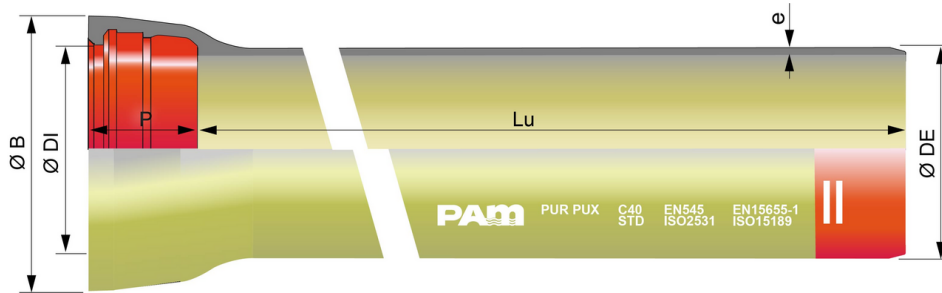

DN	Lu (m)	Class	e (mm)	ØDE (mm)	ØDI (mm)	P (mm)	ØB (mm)	Mass (kg/m)	References
150	6.00	C40	4.5	170	173.4	100.5	220.8	18.88	SSB15Q60WH
200	6.00	C40	4.7	222	225.2	106.5	275.1	25.89	SSB20Q60WH
250	6.00	C40	5.5	274	276.8	105.5	328.6	36.88	SSB25Q60WH
300	6.00	C40	6.2	326	328.8	107.5	385.3	49.05	SSB30F60WH
350	6.00	C30	6.4	378	380.9	110.5	444.5	59.13	SSB35G60WH
400	6.00	C30	6.5	429	431.9	112.5	494.6	68.30	SSB40G60WH
500	6.00	C30	7.5	532	535	117.5	600.9	97.32	SSB50G60WH
600	6.00	C30	8.7	635	638.1	132.5	712	150.60	SSB60G60WH
700	6.96	C25	8.8	738	741.7	192	821.9	162.17	SSB70H70WH
800	6.95	C25	9.6	842	845.8	197	935.6	201.53	SSB80H70WH
900	6.95	C25	10.6	945	948.9	200	1043.4	248.26	SSB90H70WH
1000	6.96	C25	11.6	1048	1052	203	1152.4	299.68	SSC10H70WH
1200	8.19	C25	13.6	1255	1258	235	1373.7	421.10	SSC12H80WH
1400	8.17	C25	15.7	1462	1465	245	1592	556.02	SSC14H80WH
1500	8.16	C25	16.7	1565	1568	265	1710	636.43	SSC15H80WH
1600	8.16	C25	17.7	1668	1671	265	1816	719.95	SSC16H80WH
1800	8.15	C25	19.7	1875	1878	275	2032	896.55	SSC18H80WH
2000	8.13	C25	21.8	2082	2085	290	2259	1100.58	SSC20H80WH

Legend:

- DN: nominal diameter
- Lu: laying length, in m
- Class: pressure class according to EN 545 and ISO 2531
- e: nominal thickness according to ISO 2531, in mm
- ØDE: external nominal diameter of the barrel according to EN 545 and ISO 2531, in mm
- ØDI: internal nominal diameter of the socket, in mm
- P: nominal depth of the socket, in mm
- ØB: nominal diameter of the socket, in mm
- Mass: total mass per metre (including polyurethane coating and socket), determined with the nominal thickness, in kg/m
- Reference: commercial reference Saint-Gobain PAM


Field of use:

- Aggressive or soft waters
- For high corrosive soils, industrial pollution zones

Main characteristics:

- Pressure class in conformity with Standard EN 545:2010 and ISO 2531:2009
- Standard joint in alimentary elastomer EPDM (ACS, KTW, WRAS,...)
- External coating: polyurethane coating (900 microns) on the barrel, red-brown epoxy (300 microns) on spigot end and inside socket - conformity to EN 14901 and EN 15189
- Internal lining: 800 microns mini thick layer of sand-coloured polyurethane

Linked products

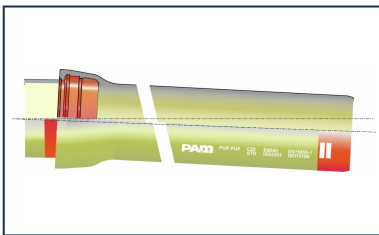

Kit Standard PUR-PUX
 Pipe + Standard Gasket



Lubricating paste -
 BLUPAM



Lubricating paste -
 NATURAL, INTEGRAL,
 and PLUVIAL ranges

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.