



Ensemble Tuyau Standard PUR avec encoches + Joint Standard CONTROL+

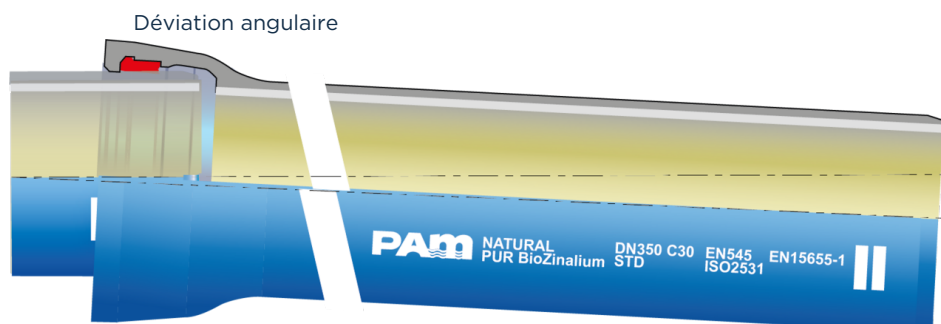

DN	Classe	Déviation angulaire	PFA	Référence
150	C40	5 °	40 bar	NSB15Q60WQV-E07
150	C64	5 °	64 bar	NSB15C60WQV-E07
200	C40	5 °	40 bar	NSB20Q60WQV-E07
200	C50	5 °	50 bar	NSB20D60WQV-E07
200	C64	5 °	64 bar	NSB20C60WQV-E07
250	C40	5 °	40 bar	NSB25Q60WQV-E07
250	C50	5 °	50 bar	NSB25D60WQV-E07
300	C40	5 °	40 bar	NSB30F60WQV-E07
300	C50	5 °	50 bar	NSB30D60WQV-E07
350	C30	4 °	30 bar	NSB35G60WQV-E07
350	C40	4 °	40 bar	NSB35F60WQV-E07
400	C30	4 °	30 bar	NSB40G60WQV-E07
500	C30	4 °	30 bar	NSB50G60WQV-E07
500	C40	4 °	40 bar	NSB50F60WQV-E07
600	C30	4 °	30 bar	NSB60G60WQV-E07
6	C40	4 °	40 bar	NSB60F60WQV-E07

Produits associés

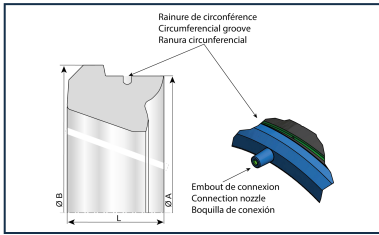

Bague de Joint
élastomère STANDARD
EPDM CONTROL+,
équipé d'une valve