



QUICK GS - Versione Semplice DN60-300

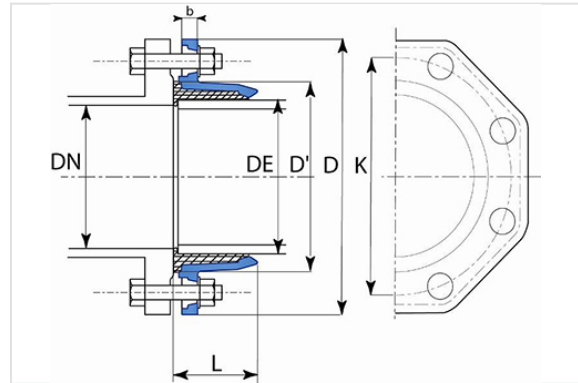

DN flangia	ØDE (mm)	L (mm)	D (mm)	D' (mm)	b (mm)	K (mm)	Massa (kg)	Codice
60-65	77	51	185	110	16	145	1,80	MAA60CACH
80	98	56	200	134,5	16	160	2,25	MAA80CACH
100	118	63	220	156	16	180	2,65	MAB10CACH
125	144	70	250	183	16	210	3,65	MAB12CACH
150	170	76	285	210	16	240	4,60	MAB15CACH
200	222	90	340	265	17	295	7,15	MAB20CACH
250	274	108	400	322	19	350 (PN10) - 355 (PN16)	10,90	MAB25CACH
300	326	117	455	373	20,5	400 (PN10) - 410 (PN16)	13,80	MAB30CACH

* DN200-250-300: flangia multiforatura ISO PN10 e ISO PN16

Materiali e rivestimenti

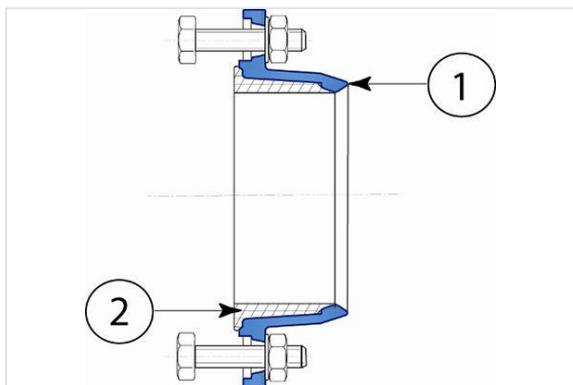

1. Controflangia: ghisa sferoidale rivestita con polvere epossidica blu dello spessore medio di 250 micron con un minimo di 200 micron, conforme alla norma EN 14901-1 (PECB)
2. Guarnizione di tenuta: EPDM