


Filtro de aço inoxidável



DN	PN	ØA (mm)	ØB (mm)	L (mm)	S (mm)	e (mm)	Øg (mm)	f (mm)	N	ØC (mm)	Ød (mm)	Peso (kg)	Referência
50	10 - 16	165	93	78	3	3	6	9	4	125	18	1,10	RCA50CACs
65	10 - 16	185	113	112	3	3	6	9	4	145	18	1,30	RCA65CACs
80	10 - 16	200	126	126	3	3	6	9	4	160	18	1,50	RCA80CACs
100	10 - 16	220	147	156	3	3	6	9	4	180	18	1,60	RCB10CACs
125	10 - 16	250	177	170	3	3	6	9	4	210	18	1,90	RCB12CACs
150	10 - 16	285	200	221	3	3	6	9	4	240	22	2,80	RCB15CACs
200	10 - 16	340	253	302	3	3	6	9	4	295	22	3,20	RCB20CABS

DN	PN	ØA (mm)	ØB (mm)	L (mm)	S (mm)	e (mm)	Øg (mm)	f (mm)	N	ØC (mm)	Ød (mm)	ØC' (mm)	Ød' (mm)	Peso (kg)	Referência
250	10 - 16	397	310	390	3	3	6	10	6	350	22	355	22	6,00	RCB25CABS
300	10 - 16	450	360	410	3	3	6	10	6	400	22	410	22	7,00	RCB30CABS
350	10 - 16	510	420	455	3	3	6	10	8	460	22	470	22	9,00	RCB35CABS
400	10 - 16	570	500	500	3	3	6	10	8	515	22	525	26	12,00	RCB40CABS

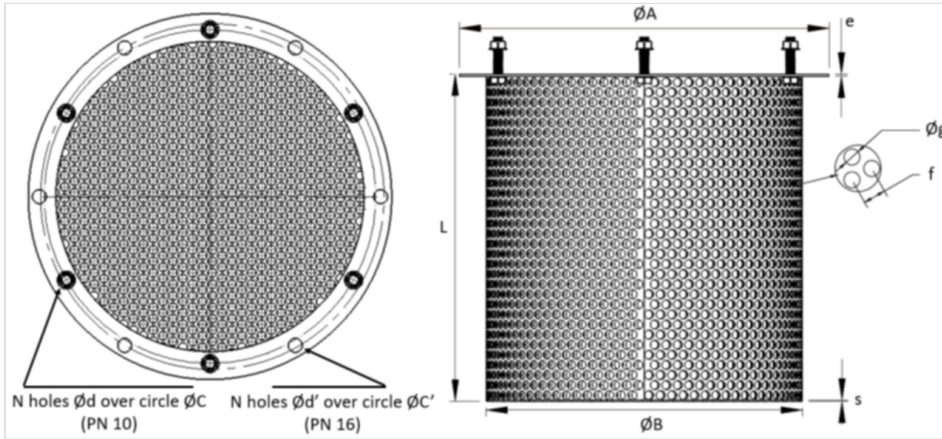

Materiais



Nº	Descrição	Materiais
1	Corpo	Aço inoxidável AISI 304
2	Porcas e parafusos	Aço inoxidável A2