


Kit Universal Standard Ve Pipe + Universal Standard Ve Joint

Angular deflection

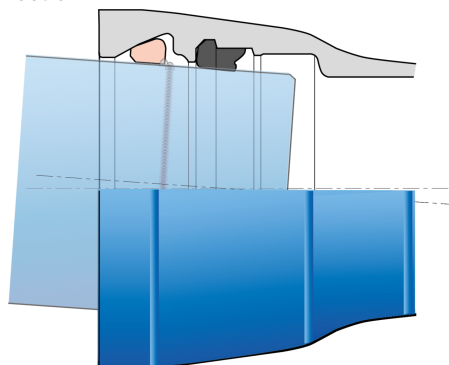

DN	Class	Angular deflection	PFA	References
100	C100	3 °	85 bar	NFB10B60AQ-E02
125	C64	3 °	63 bar	NFB12C60AQ-E02
150	C64	3 °	63 bar	NFB15N60AQ-E02
200	C64	3 °	63 bar	NFB20N60AQ-E02
250	C50	3 °	50 bar	NFB25N60AQ-E02
300	C50	3 °	41 bar	NFB30N60AQ-E02
350	C40	3 °	38 bar	NFB35F60AQ-E02
400	C40	3 °	35 bar	NFB40F60AQ-E02
450	C40	3 °	32 bar	NFB45F60AQ-E02
500	C40	3 °	30 bar	NFB50F60AQ-E02
600	C40	2 °	30 bar	NFB60F60AQ-E02
700	C30	2 °	30 bar	NFB70G70AQ-E02
700	C40	2 °	32 bar	NFB70F70AQ-E02
800	C30	2 °	25 bar	NFB80G70AQ-E02
800	C25	2 °	16 bar	NFB80H70AQ-E02
900	C30	1.5 °	25 bar	NFB90G70AQ-E02
1000	C30	1.2 °	25 bar	NFC10G70AQ-E02
1100	C30	1.1 °	25 bar	NFC11G80AQ-E02
1200	C25	1.1 °	20 bar	NFC12H80AQ-E02
1200	C30	1.1 °	25 bar	NFC12G80AQ-E02
1400	C25	1.2 °	16 bar	NFC14H80AQ-E02


DN	Class	Angular deflection	PFA	References
1400	C30	1.2 °	25 bar	NFC14G80AQ-E02
1500	C25	1 °	16 bar	NFC15H80AQ-E02
1600	C25	0.9 °	16 bar	NFC16H80AQ-E02
1800	C30	0.8 °	16 bar	NFC18G80AQ-E02

Accessories




Assembling and disassembling wedges for Universal Ve Joint


Linked products

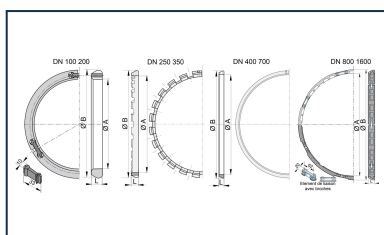

UNI STD Ve joint for Pipes and Fittings DN80-1600

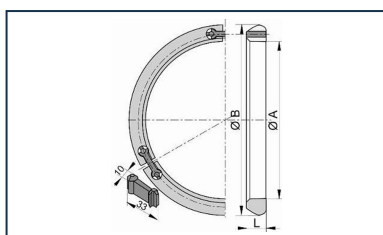

Locking Ring for UNI Ve joint DN80-1800

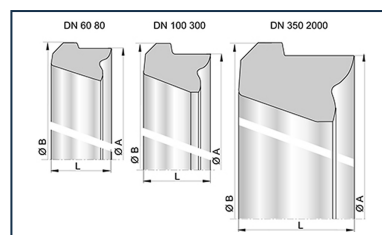

Standard gasket for Pipes and Fittings DN60-2000

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.