


Ductile Iron Swivel Connection Box DN150 body - Expandable with PVC DE315



DN saddle branch	ØDE PVC (mm)	P (mm)	H (mm)	Lt (mm)	Ødi1 (mm)	p1 (mm)	Øde2 maxi (mm)	Mass (kg)	References
150 mm	315	126	370	590	149	100	171.5	42.30	TUM31BR0J

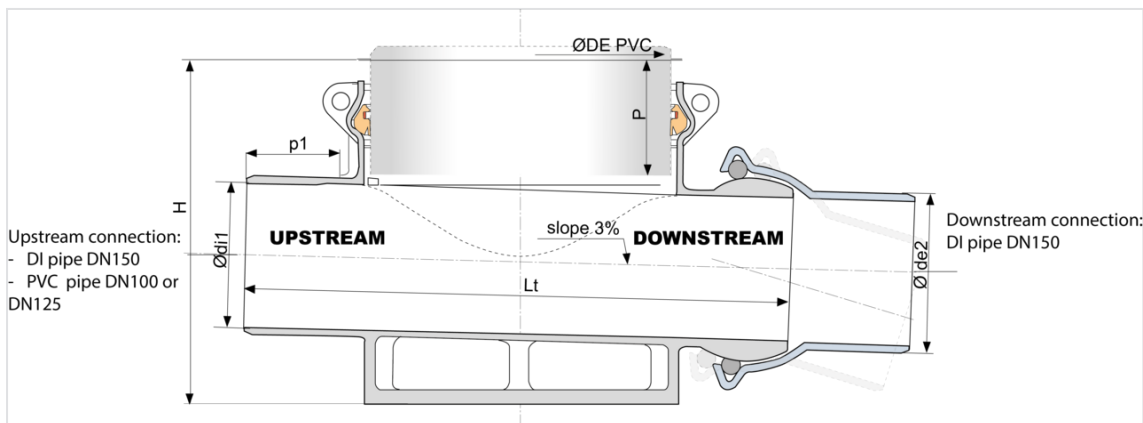


Field of use:

- Separate sewer system
- Application: gravity flow
- Type of effluent: wastewater
- Lastingly leak tight and impermeable
- Laying in all types of soils
- For effluents between pH1 and pH13

Main characteristics:

- External and internal coating: red epoxy powder 250µm (PECR)
- Fittings and joints are supplied in red-brown polyethylene bag
- EN 598 / CE Marking
- Declaration of performances [DoP-BIOGAN002EN](#)
- Designed according to the regulatory texts:
 - NF EN 476: general prescriptions for components used in the networks
 - NF EN 752: Conception of sewage projects
 - NF EN 1610: Reception of the works
 - CCTG: Fascicule 70 (sewage work)
- Body and ball joint in ductile iron
- Joint DE 315 in nitrile rubber
- With a rotatable downstream branch to facilitate installation
- Joint DE 315 allows a connection PVC pipe
- To install:
 - Upstream: connection with a ductile iron pipe DN150 or with a PVC pipe OD125 or OD100 ; in that case plan to order a reduction joint reference TXB15NBF or TXB15NBG
 - Downstream: the adjustable outlet allows for 20° adjustment to the left, right, and downwards thanks to the adjustable branch which accepts a DN150 BIOGAN or INTEGRAL pipe

Installation on PVC tube diameter 100 or 125 upstream

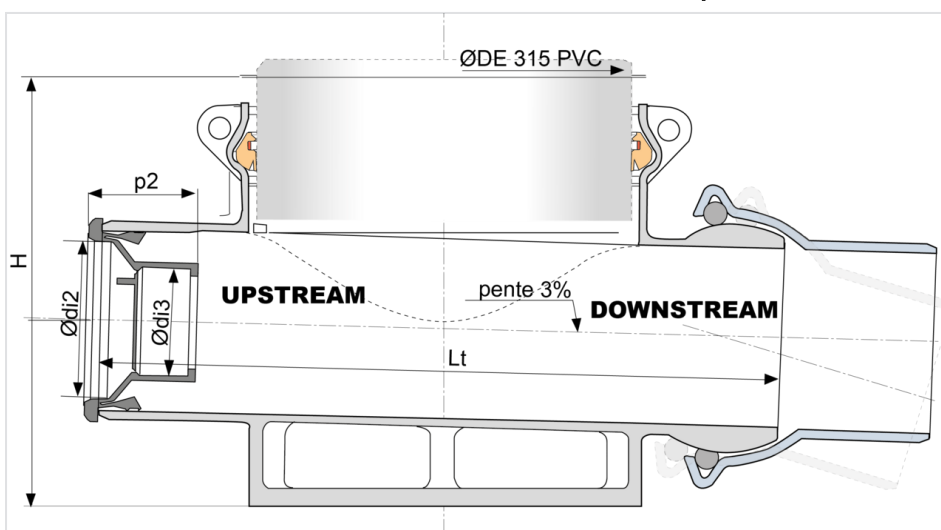

ØDE PVC mm	H mm	Lt mm	p2 mm	OD piquage	Ødi2 maxi mm	Ødi3 (range of diameter) mm	References
315	370	590	94	100	133	100-112	TUM31BR0J + TXB15NBF
315	370	590	94	125	133	120-130	TUM31BR0J + TXB15NBG

Linked products



Reduction Joint for
Connection Chamber

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.