



**SELECTA MAXI PMR Gully unit 90° profile - Grating with selector bar - Flat grating  
- C250 class**

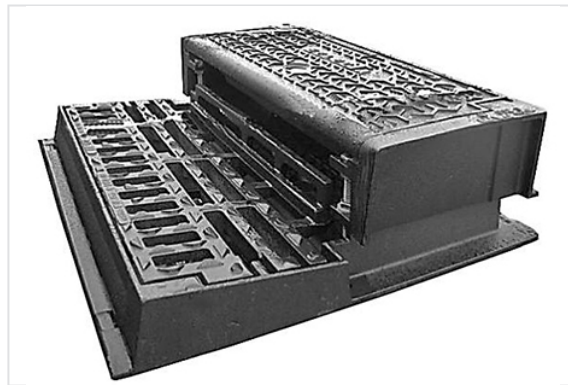

AxB (mm)	Grating mass (kg)	Cover mass (kg)	Mass of frame + extension (kg)	Total mass (kg)	Waterway area	Packaging	References
750x640	25	24	40	89.00	10.1 → 13 dm <sup>2</sup>	6	ECSE75MFX11

AxB (mm)	C (mm)	D (mm)	E (mm)	H (mm)	h1 (mm)	h2 (mm)	Depth adjustment (mm)
750x640	275	311	353	225	90	70	70

Width of the openings: 18 mm ≤L≤ 20 mm - Length of the openings: 55 mm ≤L≤ 165 mm

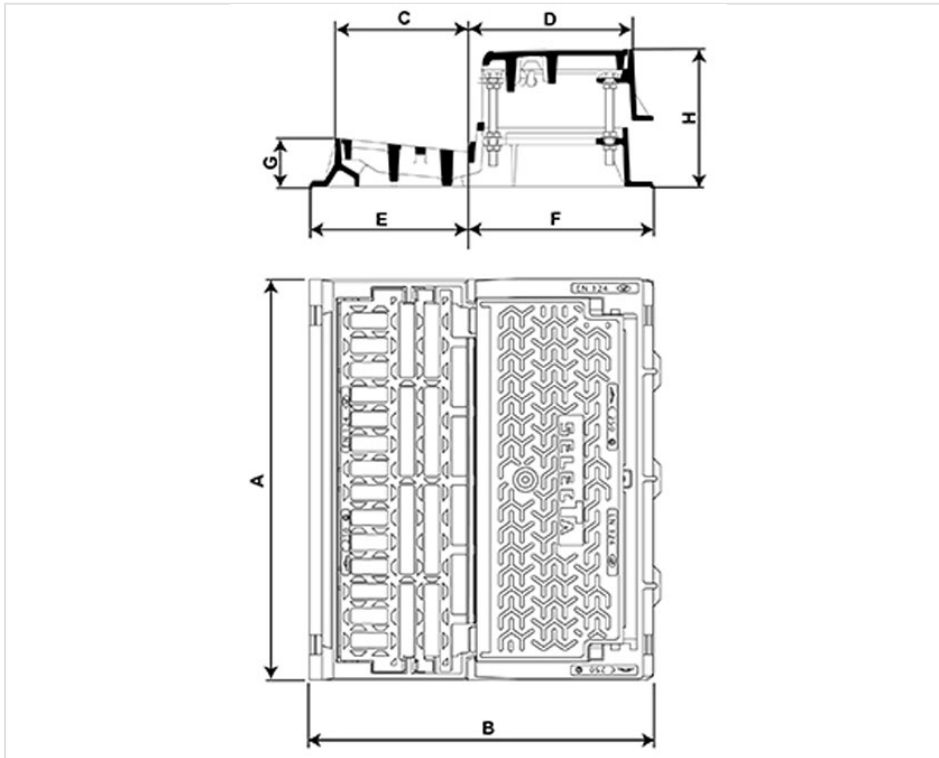

### Material and coating:

- Frame, grating and cover in Ductile Iron EN GJS 400-15: water base

### Origine France Garantie

- This product is made in France in our foundry in Blénod-les-Pont-A-Mousson (54), and is certified Origine France Garantie. This guarantees consumers that the product is made in France in accordance with specifications available on [originefrancegarantie.fr](http://originefrancegarantie.fr). The certification number is: BVCert 6026906.
- *"Origine France Garantie certification is awarded by an independent certification body. Checks are then carried out every year to ensure that the product is indeed 100% made in France and that at least 50% of the product's manufacturing costs (including raw materials) are of French origin".*

## Field of application:

- C250 class (Group 3) according to standard EN 124-2, destined to the circulated pavements and similar locations exposed to the access of vehicles.

## Main characteristics:

- Grating and cover:
  - Hinged separately and can be easily dismantled
  - Secured by spring-bar lock requiring a tool for the opening.
- Grating design is optimized for the absorption and safety.
- Total opening offering a wide surface of access: 540 x 450 mm.
- Frame in 2 parts adjustable in height and slope.
- Adjustment screws inside allowing the tuning after embedding.
- [Implementation](#)

## Linked products



Gully units SELECTA 500  
and MAXI C250 -  
Implementation

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*