


Stainless steel foot strainer



DN	PN	ØA (mm)	ØB (mm)	L (mm)	S (mm)	e (mm)	Øg (mm)	f (mm)	N	ØC (mm)	Ød (mm)	Mass (kg)	References
50	10 - 16	165	93	78	3	3	6	9	4	125	18	1.10	RCA50CACS
65	10 - 16	185	113	112	3	3	6	9	4	145	18	1.30	RCA65CACS
80	10 - 16	200	126	126	3	3	6	9	4	160	18	1.50	RCA80CACS
100	10 - 16	220	147	156	3	3	6	9	4	180	18	1.60	RCB10CACS
125	10 - 16	250	177	170	3	3	6	9	4	210	18	1.90	RCB12CACS
150	10 - 16	285	200	221	3	3	6	9	4	240	22	2.80	RCB15CACS
200	10 - 16	340	253	302	3	3	6	9	4	295	22	3.20	RCB20CABS

DN	PN	ØA (mm)	ØB (mm)	L (mm)	S (mm)	e (mm)	Øg (mm)	f (mm)	N	ØC (mm)	Ød (mm)	ØC' (mm)	Ød' (mm)	Mass (kg)	References
250	10 - 16	397	310	390	3	3	6	10	6	350	22	355	22	6.00	RCB25CABS
300	10 - 16	450	360	410	3	3	6	10	6	400	22	410	22	7.00	RCB30CABS
350	10 - 16	510	420	455	3	3	6	10	8	460	22	470	22	9.00	RCB35CABS
400	10 - 16	570	500	500	3	3	6	10	8	515	22	525	26	12.00	RCB40CABS

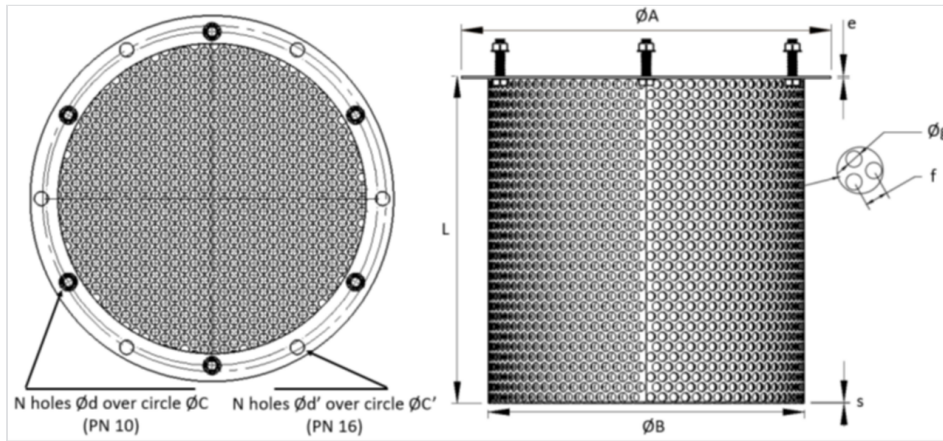

Material



N°	Item	Material
1	Body	Stainless steel AISI 304
2	Bolting	Stainless steel

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.