


## STD Ve joint for fittings DN80-1200

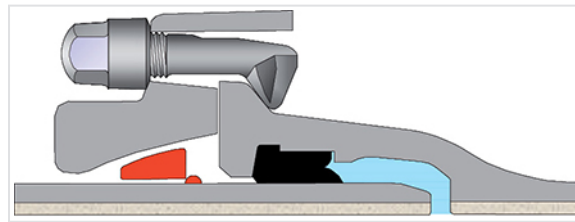


The STANDARD Ve joint is a push-on joint with a weld bead; the watertightness is made by the compression of the elastomer gasket which operates during the assembling by the introduction of the spigot end inside the socket. The anchoring is reinforced by the addition of a gland and of bolts.

DN	References
80 mm	JSA80V-E02
100 mm	JSB10V-E02
125 mm	JSB12V-E02
150 mm	JSB15V-E02
200 mm	JSB20V-E02
250 mm	JSB25V-E02
300 mm	JSB30V-E02
350 mm	JSB35V-E02
400 mm	JSB40V-E02
450 mm	JSB45V-E02
500 mm	JSB50V-E02
600 mm	JSB60V-E02
700 mm	JSB70V-E02
800 mm	JCB80V-E02
900 mm	JCB90V-E02
1000 mm	JCC10V-E02
1100 mm	JSC11V-E02
1200 mm	JSC12V-E02


## Details

DN mm	Mass of gland kg	Reference of gland	Mass of locking ring kg	Locking ring	Mass of gasket kg	References of gasket	Mass of bolts kg	Number	References of bolts
80	3.500	JSA80V	0.564	JSA80S	0.148	JSA80BA	1.560	4	JXM22BN70
100	4.800	JSB10V	0.489	JSB10S	0.196	JSB10BA	1.560	4	JXM22BN70
125	5.900	JSB12V	0.692	JSB12S	0.244	JSB12BA	2.340	6	JXM22BN70
150	7.500	JSB15V	0.952	JSB15S	0.285	JSB15BA	2.340	6	JXM22BN70
200	9.500	JSB20V	1.512	JSB20S	0.384	JSB20BA	3.120	8	JXM22BN70
250	21.000	JSB25V	2.800	JSB25E	0.497	JSB25BA	4.740	6	JXM27BN102
300	28.000	JSB30V	3.700	JSB30E	0.712	JSB30BA	6.320	8	JXM27BN102
350	30.500	JSB35V	4.500	JSB35E	0.898	JSB35BA	6.320	8	JXM27BN102
400	37.700	JSB40V	4.500	JSB40E	1.077	JSB40BA	7.900	10	JXM27BN102
450	43.000	JSB45V	6.000	JSB45E	1.323	JSB45BA	11.060	14	JXM27BN102
500	61.700	JSB50V	6.700	JSB50E	1.544	JSB50BA	12.640	16	JXM27BN102
600	63.500	JSB60V	9.600	JSB60E	2.162	JSB60BA	15.800	20	JXM27BN102
700	109.000	JSB70V	14.600	JSB70E	2.871	JSB70BA	20.520	24	JXM27BN123
800	140.000	JCB80V	15.750	JSB80S	3.670	JSB80BA	25.650	30	JXM27BN123
900	184.000	JCB90V	17.200	JSB90S	4.612	JSB90BA	25.650	30	JXM27BN123
1000	211.000	JCC10V	19.350	JCC10S	5.588	JSC10BA	25.650	30	JXM27BN123
1100	232.000	JSC11V	17.500	JSC11S	7.680	JSC11BA	34.200	40	JXM27BN123
1200	222.000	JSC12V	21.500	JSC12S	9.335	JSC12BA	34.200	40	JXM27BN123


## Linked products

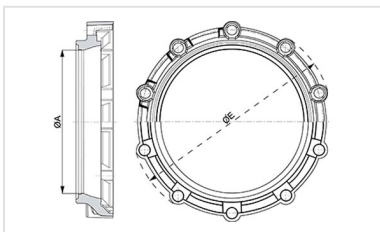


Gland for STD Ve joint  
DN80-1200

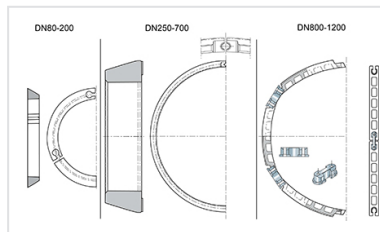

Locking ring for STD Ve  
joint DN80-1200

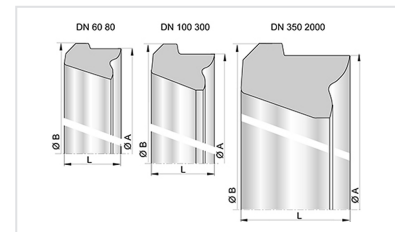

Standard gasket for Pipes  
and Fittings DN60-2000

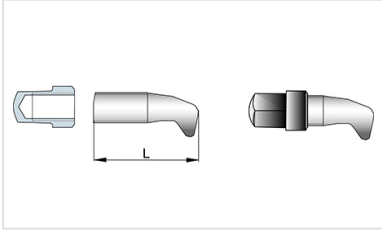

Iron bolt for STD Ve joint

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*

*COPYRIGHT AND DESIGN RIGHT : This drawing is the exclusive property of Saint-Gobain PAM UK and is confidential and must not be reproduced or disclosed for any third party without written consent. It must be used only for the purpose for which it has been issued and is returnable on request*