


## Manhole cover ULT-EMAX D400 class Square frame – Not-ventilated



| AxB (mm) | CxD (mm) | H (mm) | Cover mass (kg) | Total Mass (kg) | Packaging | Label  |
|----------|----------|--------|-----------------|-----------------|-----------|--------|
| 600x600  | 806x806  | 100    | 27.3            | 80.00           | 10        | 205763 |
| 600x600  | 806x806  | 150    | 27.3            | 91.00           | 10        | 205765 |
| 675x675  | 880x830  | 100    | 35.5            | 98.50           | 10        | 211605 |
| 675x675  | 880x830  | 150    | 35.5            | 109.70          | 5         | 211606 |

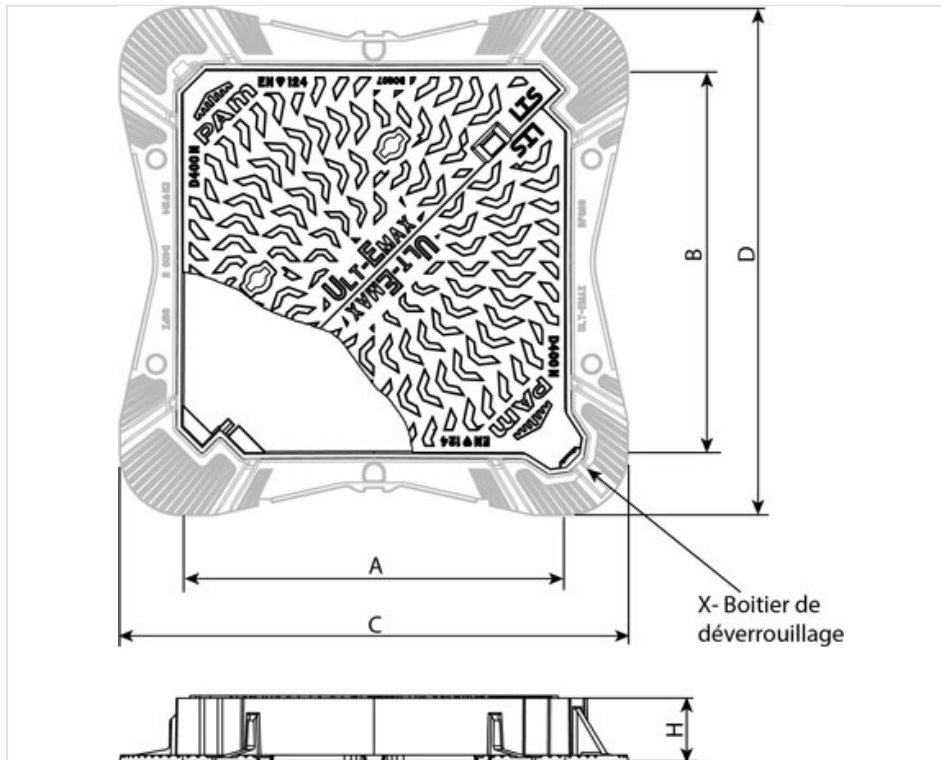

### Material and coating:

- Cover and frame in Ductile Iron 500/7 to EN1563
- Water based coating

### Field of use:

- D400 Class (Group 4) according to standard EN 124, carriageways of roads, hard shoulders and parking areas for all types of road vehicles.
- Heavy traffic zones and frequent visits.

### Main characteristics:

- Double triangular
- Non-rock design
- Automatic cover security locking
- Single cover hinged design
- LTS installation and durability features
- HA104/09 compliant
- Sewers for Adaption 6 compliant



## DURABILITY



Includes the Load Transfer System (LTS) for optimum installation and product durability

## SECURITY



Integral automatic spring bar locking feature to deter unauthorised access offering increased asset security

## PERFORMANCE D400



Three point suspension ensures non-rock and silent in operation performance

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*

*COPYRIGHT AND DESIGN RIGHT : This drawing is the exclusive property of Saint-Gobain PAM UK and is confidential and must not be reproduced or disclosed for any third party without written consent. It must be used only for the purpose for which it has been issued and is returnable on request*