


Hydraulic manhole cover AKSESS Wind rose B125 class - Non locked



Wind rose version for littoral regions

Type	AxA (mm)	OxO (mm)	A1xA2 (mm)	C1xC2 (mm)	H (mm)	h (mm)	Total Mass (kg)	Cover mass (kg)	Packaging	References
300	310x310	220X220	295x292	280x278	37	31	8.20	4.9	10 / 60	CBAK30HFM07
400	410x410	300X300	383x375	368x359	37	31	11.80	7.3	10 / 60	CBAK40HFM07
500	510x510	400x400	477x476	462x461	38	32	17.80	11.2	10 / 40	CBAK50HFM07
600	610x610	500x500	577x575	562x563	38	32	30.30	22.5	10	CBAK60HFM07
700	710x710	600x600	677x676	662x662	38	32	43.80	34.5	10	CBAK70HFM07
800	820x820	700x700	785x786	771x771	41	35	54.60	44.3	10	CBAK80HFM07

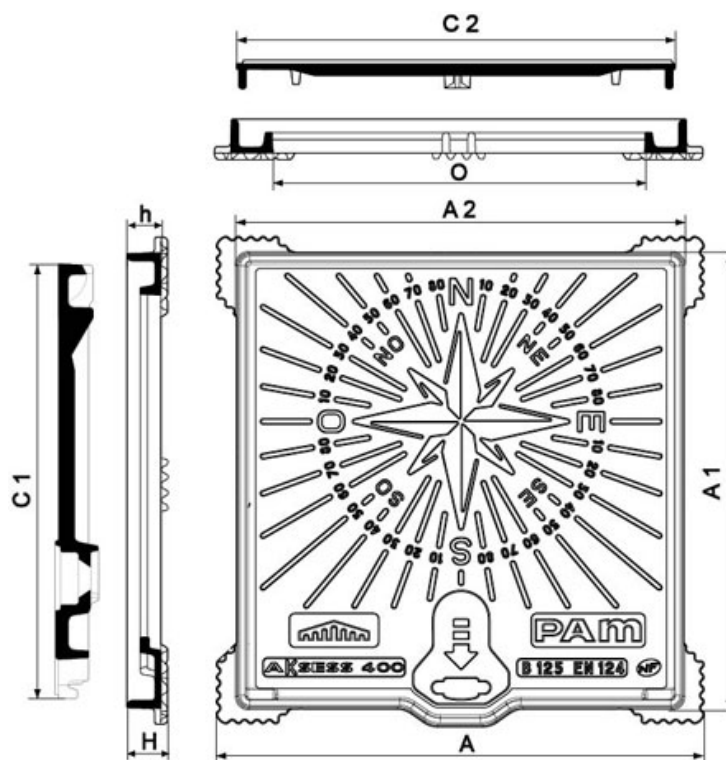

Material and coating:

- Frame and cover in Ductile Iron EN GJS 400-15: water base coating

Field of application:

- B125 class (Group 2) according to standard EN124-2, footways, pedestrian areas and comparable areas, car parks and car parking decks.


Main characteristics:

- Single seal hydraulic manhole cover
- [Non-rock system ensuring the stability of the cover in its frame](#)
- [Frame with notched flange enabling an effective bedding](#)
- [Easy and ergonomic handling with hinged or slid opening](#)


Option: AkseSS "Territoriales by PAM" is of course eligible for the Color by PAM program

Warning: customization is not possible.


Linked products

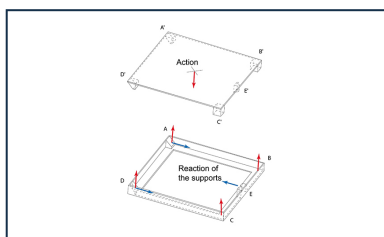

Hydraulic manhole covers
AKSESS - Stability of the
covers

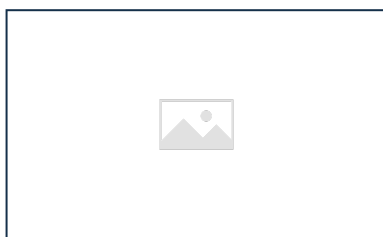

Hydraulic manhole covers
AKSESS - Bedding

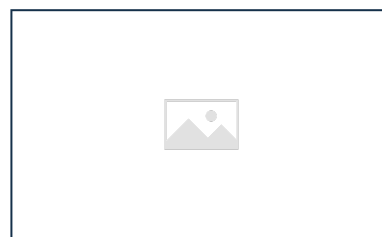

Hydraulic manhole covers
AKSESS and PARXESS -
Ergonomics - Handling

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.