
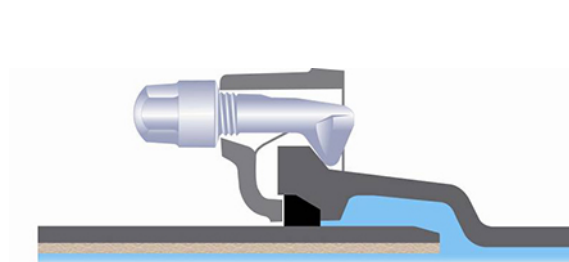


Kit Express Joint for Express Fittings DN200 to 1200

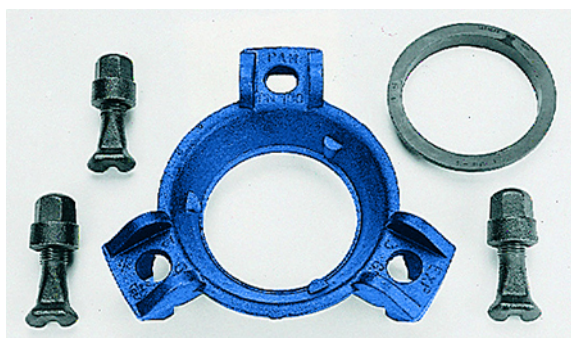

The Express joint is a mechanical joint. The water tightness is made by the axial compression of an elastomer gasket thanks to a gland tightened with iron bolts.

DN	References
200 mm	JEB20KNN2
200 mm	JEB20ANN2-E00
250 mm	JEB25KNN2
250 mm	JEB25ANN2-E00
300 mm	JEB30KNN2
300 mm	JEB30ANN2-E00
350 mm	JEB35ANN2-E00
400 mm	JEB40ANN2-E00
450 mm	JEB45ANN2-E00
500 mm	JEB50ANN2-E00
600 mm	JEB60ANN2-E00
700 mm	JEB70ANN2-E00
800 mm	JEB80ANN2-E00
900 mm	JEB90ANN2-E00
1000 mm	JEC10ANN2-E00
1100 mm	JEC11ANN2-E00
1200 mm	JEC12ANN2-E00

Field of use:

- For drinking water networks

Main characteristics:

- Elastomer quality: EPDM (EN 681-1)
- Coating of the gland: Aquacoat fittings
- Iron bolts (Galvanization + parkerization + black cataphoresis)
- EN 545
- High angular deflection possible

Details

DN	Mass of gland	Reference of gland	Mass of gasket	References of gasket	Mass of bolts	Number	References of bolts
mm	kg		kg		kg		
200	5.000	JEB20ANN2	0.202	JEB20BA	1.950	5	JXM22BN70
250	6.200	JEB25ANN2	0.252	JEB25BA	2.340	6	JXM22BN70
300	8.000	JEB30ANN2	0.346	JEB30BA	2.730	7	JXM22BN70
350	9.000	JEB35ANN2	0.461	JEB35BA	3.120	8	JXM22BN70
400	11.000	JEB40ANN2	0.520	JEB40BA	3.510	9	JXM22BN70
450	16.500	JEB45ANN2	0.660	JEB45BA	6.320	8	JXM27BN102
500	19.500	JEB50ANN2	0.725	JEB50BA	7.900	10	JXM27BN102
600	26.000	JEB60ANN2	1.048	JEB60BA	9.480	12	JXM27BN102
700	38.000	JEB70ANN2	2.565	JEB70BA	12.640	16	JXM27BN102
800	47.000	JEB80ANN2	3.310	JEB80BA	14.220	18	JXM27BN102
900	58.000	JEB90ANN2	4.177	JEB90BA	15.800	20	JXM27BN102
1000	70.000	JEC10ANN2	5.220	JEC10BA	18.960	24	JXM27BN102
1100	83.000	JEC11ANN2	6.140	JEC11BA	20.540	26	JXM27BN102
1200	99.000	JEC12ANN2	7.390	JEC12BA	23.700	30	JXM27BN102

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.