


Manhole cover PAMREX 600 Safety D400 class Round frame - Ventilated



A (mm)	C (mm)	O (mm)	H (mm)	E (mm)	F (mm)	Total Mass (kg)	Cover mass (kg)	Packaging	References
850	673	610	100	85	50	84.36	53	10	CDPA60FA

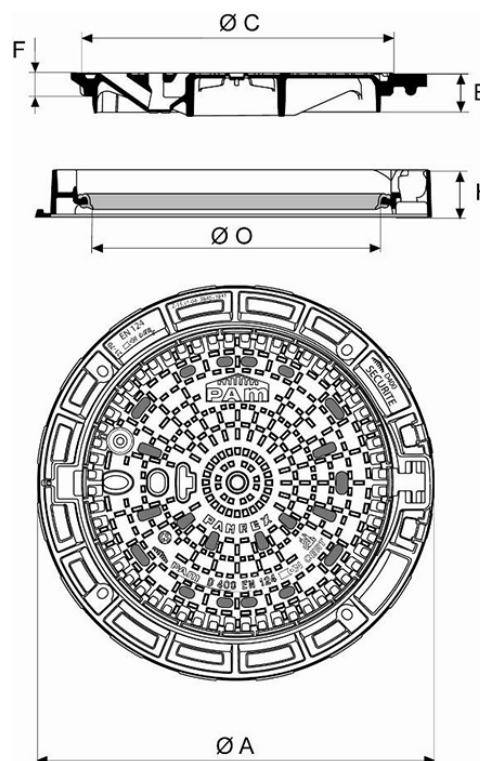

Material and coating:

- Frame and cover in Ductile Iron EN GJS 400-15: water base coating
- [Ring in elastomer](#)

Field of application:

- D400 class (Group 4) according to standard EN124-2, carriageways of roads, hard shoulders and parking areas for all types of road vehicles.
- Heavy traffic zones and frequent visits.

Main characteristics:

- [Hinged cover and ergonomic handling box](#)
- Interchangeable covers
- Frame fitted for optimized bedding
- Opens to 130°, blocks at 90° when closing
- [Identification of the versions](#)
- [Operating Key C24](#)

Security

- [Quarter turn locking system](#)
- [Anti-theft pins](#)
- [Mudpan](#)

Accessories



Elastomer Ring



1/4 turn locks



Anti-theft pins for
PAMREX / VIATOP 600
and 700 / VIATOP 2
manhole cover



Mudpan for PAMREX
manhole covers




Accessories for Manhole
Covers: operating key
C24 for PAMREX, VIATOP
and VIATOP 2 Manhole
covers

Linked products



PAMREX / VIATOP
manhole covers

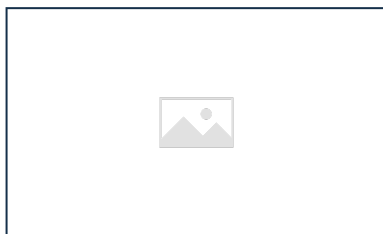

Identification of PAMREX
manhole covers versions

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.