


Mobile flanges DN40-600

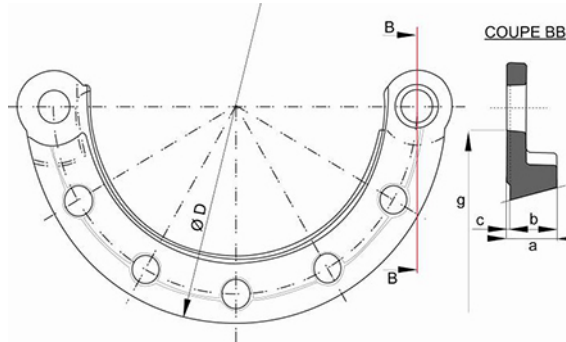

DN (mm)	PN	ØD (mm)	Øg (mm)	a (mm)	b (mm)	c (mm)	Mass (kg)	References
40	10 16 25 40	150	84	22	19	3	0.70	BAA40BO10TT
50	10 16 25 40	165	99	22	19	3	0.80	BAA50BO10TT
60	10 16	175	108	22.5	19.5	3	0.69	BAA60BO10TT
60	25 40	175	108	22.5	19.5	3	0.70	BAA60BO30TT
65	10 16	185	108	22.5	19.5	3	1.10	BAA65BO10TT
65	25 40	185	108	22.5	19.5	3	1.20	BAA65BO30TT
80	10 16 25 40	200	132	23	20	3	0.89	BAA80BO10TT
100	10 16	235	156	23	20	3	0.90	BAB10BO10TT
100	25 40	235	156	23	20	3	1.52	BAB10BO30TT
125	10 16	270	186	24.5	21.5	3	1.22	BAB12BO10TT
125	25 40	270	186	24.5	21.5	3	2.05	BAB12BO30TT
150	10 16	300	211	26	23	3	1.58	BAB15BO10TT
150	25 40	300	211	26	23	3	2.60	BAB15BO30TT
200	10	340	266	29	26	3	2.95	BAB20BO10TT
200	16	340	266	29	26	3	3.05	BAB20BO20TT
200	25	360	266	29	26	3	3.69	BAB20BO30TT
250	10	400	319	32	29	3	4.20	BAB25BO10TT
250	16	400	319	32	29	3	4.20	BAB25BO20TT
250	25	425	319	32	29	3	5.55	BAB25BO30TT
300	10	455	370	36	32	4	5.55	BAB30BO10TT
300	16	455	370	36	32	4	5.30	BAB30BO20TT
300	25	485	370	36	32	4	7.18	BAB30BO30TT

DN (mm)	PN	ØD (mm)	Øg (mm)	a (mm)	b (mm)	c (mm)	Mass (kg)	References
350	10	505	429	39	35	4	7.00	BAB35BO10TT
350	16	520	429	39	35	4	7.50	BAB35BO20TT
350	25	555	429	39	35	4	10.34	BAB35BO30TT
400	10	565	482	42	38	4	4.15	BAB40BQ10TT
400	16	580	480	42	38	4	5.20	BAB40BQ20TT
400	25	620	482	42	38	4	7.50	BAB40BQ30TT
450	10	615	527	45	41	4	5.15	BAB45BQ10TT
450	16	640	527	45	41	4	6.75	BAB45BQ20TT
450	25	670	527	45	41	4	8.60	BAB45BQ30TT
500	10	670	582	48	44	4	6.25	BAB50BQ10TT
500	16	715	582	48	44	4	9.50	BAB50BQ20TT
500	25	730	582	48	44	4	11.00	BAB50BQ30TT
600	10	780	682	55	50	5	8.25	BAB60BQ10TT
600	16	840	682	55	50	5	14.50	BAB60BQ20TT
600	25	845	682	55	50	5	15.25	BAB60BQ30TT

External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901 (PECB).

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.