


Taper (PECB) with 2 sockets UNIVERSAL STANDARD

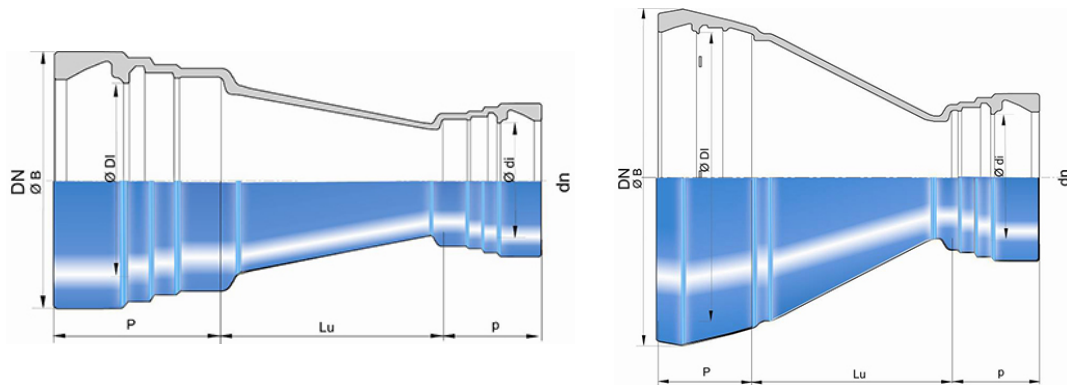

DN (mm)	Ødn (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	p (mm)	Ødi (mm)	Mass (kg)	References
100	80	90	143.3	121	177	137.2	101	12.50	SFB10VE0ETT
150	80	190	148	173	230	137.2	101	18.30	SFB15VE0ETT
150	100	150	150	173	230	142	121	20.00	SFB15VE0FTT
200	100	250	158	225	290	143.3	121	29.00	SFB20VE0FTT
200	150	150	158	225	290	148	173	30.20	SFB20VE0JTT
250	100	350	166	277	347	142	121	36.00	SFB25VE0FTT
250	150	250	166	277	347	150	173	40.00	SFB25VE0JTT
250	200	150	166	277	347	158	225	40.00	SFB25VE0KTT
300	150	350	178	329	406	150	173	55.50	SFB30VE0JTT
300	200	250	178	329	406	158	225	57.80	*
300	250	150	178	329	406	166	277	58.00	SFB30VE0LTT
400	300	260	176	432	512	178	329	86.00	SFB40VE0MTT
500	400	260	200	535	626	176	432	125.00	SFB50VE0NTT
900	800	280	275	948.9	1093	261	845.8	616.70	*

* Consult us


Field of use:

- To use under high to very high pressures


Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products

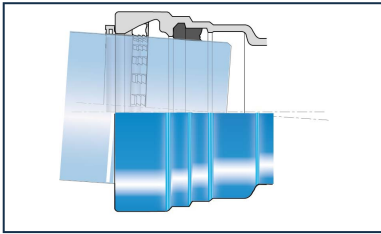

Kit Universal Standard
Fitting PECB + Universal
Standard Vi Joint

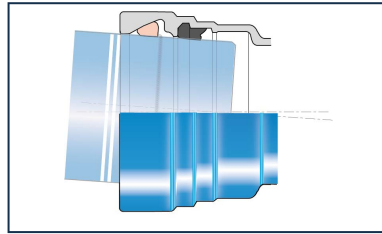

Kit Universal Standard
Fitting PECB + Universal
Standard Ve Joint

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.