


## TELECOM Duct cover T-MAX-i ½L4T C250

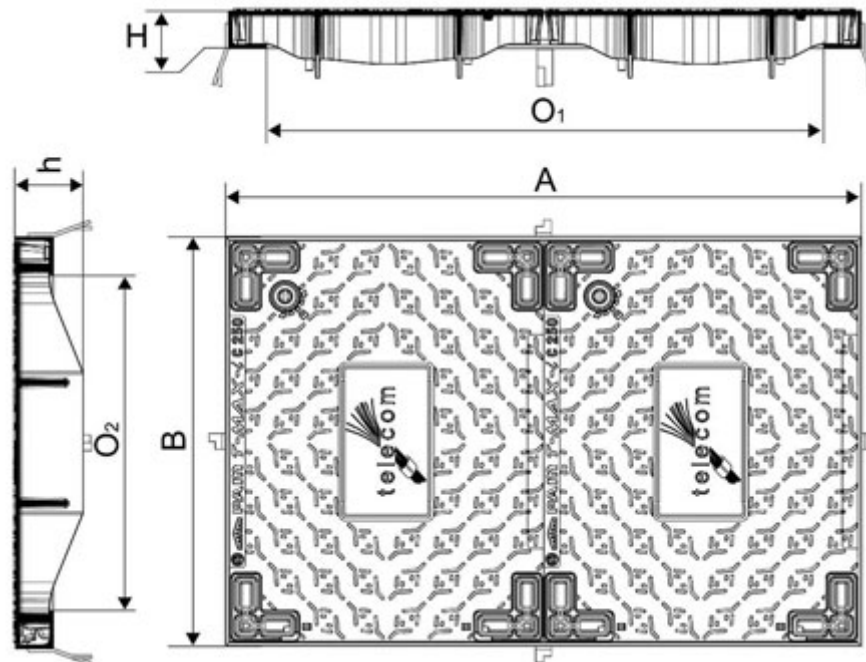

AxB (mm)	O1xO2 (mm)	H (mm)	h (mm)	Total mass (kg)	Cover mass (kg)	Packaging	References
1004x647	884x527	60	107	68.90	26	5	DC1LTMIZTEL
1004x647	884x527	60	107	68.90	26	5	DC1LTMIZ

### Material and coating:

- Cover 633x495mm in Ductile Iron EN GJS 400-15: water base
- Frames in steel, galvanized

### Field of application:

- C250 class (Group 3) according to standard EN 124-2, intended for the circulated pavements and similar locations subjected to the passage of vehicles.
- Conforms to NF P98-050-2 for underground structures for the accommodation of dry networks - Part 2: Closing devices



## Main characteristics:

- Frame in galvanized steel angles 60 x 60 x 6 mm.
- Covers with soundproofing pads.
- Articulation and security kits (optional) being able to set up on place.

## Conformity:

Saint-Gobain PAM attests that:


- the above mentioned products are manufactured in compliance with specifications, materials & characteristics as per EN124-2 : 2015 standard
- the features and performances of the above mentioned products are controlled and comply with requirements of EN124-1 : 2015 standard

The PAM brand affixed on these related products materialises this attestation of conformity.

## Kits

- Security and articulation [D29](#) (quantity 1) and [D30](#) (quantity 1)

## Linked products

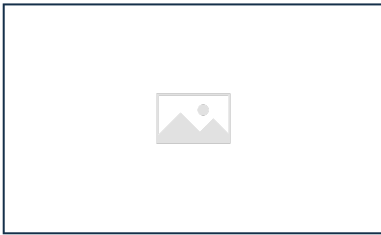

Kit for assistance and security for Telecom duct covers T-MAXi

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*