



## Kit Standard INTEGRAL PUX Pipe + Standard Gasket

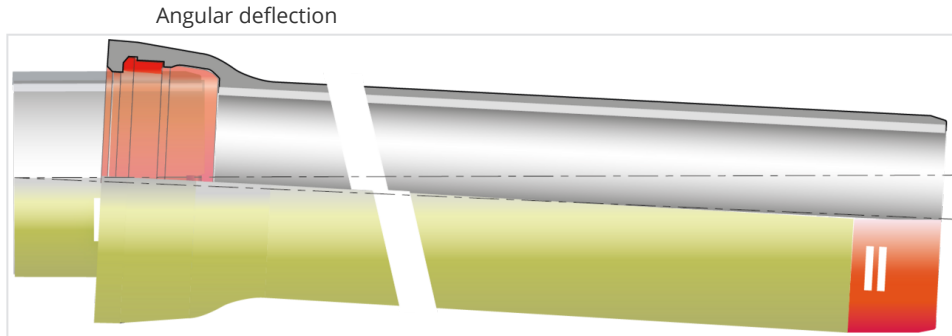

DN	Angular deflection	PFA	References
150	5 °	40 bar	TSB15S60BH-E01
200	5 °	40 bar	TSB20S60BH-E01
250	5 °	38 bar	TSB25S60BH-E01
300	5 °	35 bar	TSB30S60BH-E01
350	4 °	32 bar	TSB35S60BH-E01
400	4 °	30 bar	TSB40S60BH-E01
450	4 °	29 bar	TSB45S60BH-E01
500	4 °	28 bar	TSB50S60BH-E01
600	4 °	26 bar	TSB60S60BH-E01
700	4 °	29 bar	TSB70E69BH-E01
800	4 °	28 bar	TSB80E69BH-E01
900	4 °	27 bar	TSB90E69BH-E01
1000	4 °	26 bar	TSC10E69BH-E01
1100	4 °	29 bar	TSC11N79BH-E01
1200	4 °	29 bar	TSC12N79BH-E01
1400	3 °	28 bar	TSC14N80BH-E01
1600	3 °	27 bar	TSC16N80BH-E01
1800	2.5 °	27 bar	TSC18N80BH-E01
2000	2 °	26 bar	TSC20N80BH-E01

## Linked products

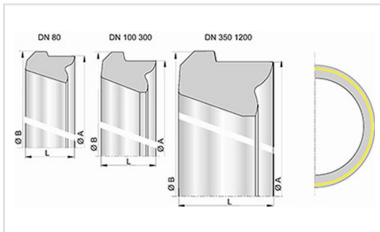

Nitrile STD Gasket  
DN80-2000

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*