


## Asymmetrical Coupling in ductile iron for DI/PVC + STD G Joint + Klikso Joint

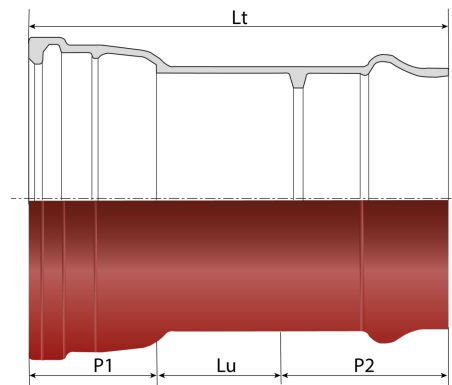

DN (mm)	ØDE iron (mm)	ØDE PVC (mm)	P1 iron (mm)	P2 PVC (mm)	Lu (mm)	Lt (mm)	Mass (kg)	References
150	169.7	160	100.5 mm	114	103.5	318	9.70	TJB15MVJS
200	221.6	200	106.5 mm	118	125.5	350	15.20	TJB20MVKS

### Field of use:

- Separate sewer system
- Application: gravity flow
- Type of effluent: wastewater
- Lastingly leak tight and impermeable
- Laying in all types of soils
- For effluents between pH1 and pH13

### Main characteristics:

- External and internal coating: red epoxy powder 250µm (PECR)
- STANDARD G Gasket (STD G) in Nitrile
- PVC Klikso joint: EPDM
- Fittings and joints are supplied in red-brown polyethylene bag
- EN 598 / CE Marking
- Declaration of performances [DoP-BIOGAN002EN](#)
- Designed according to the regulatory texts:
  - NF EN 476: general prescriptions for components used in the networks
  - NF EN 752: Conception of sewage projects

- NF EN 1610: Reception of the works
- CCTG: Fascicule 70 (sewage work)

## Linked products



Standard G Gasket (STD G) for BIOGAN pipes and fittings DN150-200

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*