



Ductile iron Saddle 90° Gravitary to round cutting on Iron pipe

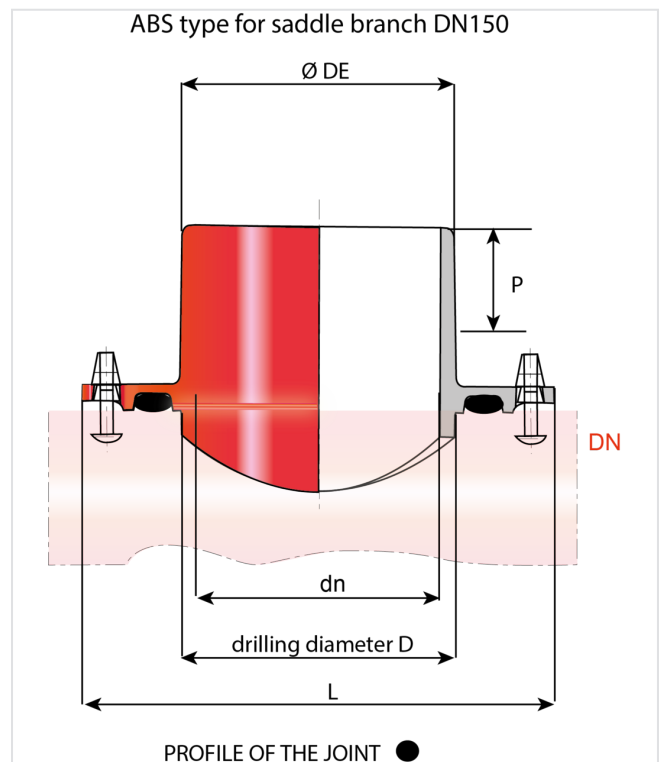

DN connector	DN saddle branch	ØDE (mm)	D (mm)	L (mm)	P (mm)	Mass (kg)	References
250 mm	150 mm	168.0	172.5 ± 1	290	90	10.00	TUB25SR0J
300 mm	150 mm	168.0	172.5 ± 1	290	90	9.70	TUB30SR0J
350 + 400 mm	150 mm	168.0	172.5 ± 1	290	90	10.00	TUB40SR0J
450 → 600 mm	150 mm	168.0	172.5 ± 1	290	90	10.00	TUB45SR0J
700 → 1200 mm	150 mm	168.0	172.5 ± 1	290	90	7.60	TUB70SR0J
300 mm	200 mm	217.5	232.5 ± 1	340	100	13.00	TUB30SR0K
400 mm	200 mm	217.5	232.5 ± 1	340	100	13.00	TUB40SR0K
450 → 600 mm	200 mm	217.5	232.5 ± 1	340	100	11.10	TUB45SR0K
700 + 800 mm	200 mm	217.5	232.5 ± 1	340	100	13.00	TUB70SR0K
900 → 1200 mm	200 mm	217.5	232.5 ± 1	340	100	10.00	TUB90SR0K

Note: supplied with bolts set and laying instructions. (*) please consult us.

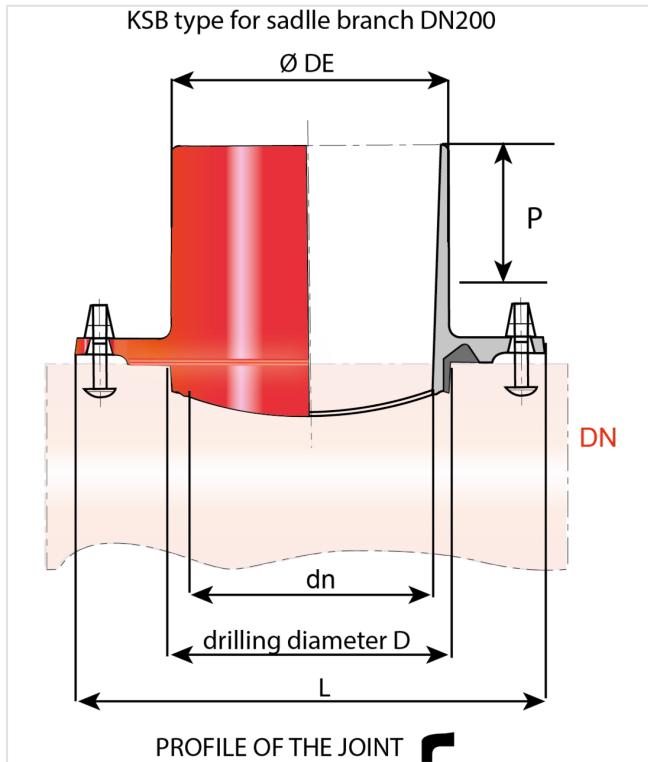


Field of use:

- Separate sewer system
- Application: gravity flow
- Type of effluent: wastewater
- Lastingly leak tight and impermeable
- Laying in all types of soils
- For effluents between pH1 and pH13

Main characteristics:

- External and internal coating: red epoxy powder 250µm (PECR)
- Fittings and joints are supplied in red-brown polyethylene bag
- EN 598 / CE Marking
- Declaration of performances [DoP-BIOGAN002EN](#)
- Designed according to the regulatory texts:
 - NF EN 476: general prescriptions for components used in the networks
 - NF EN 752: Conception of sewage projects
 - NF EN 1610: Reception of the works
 - CCTG: Fascicule 70 (sewage work)

Material and coating:

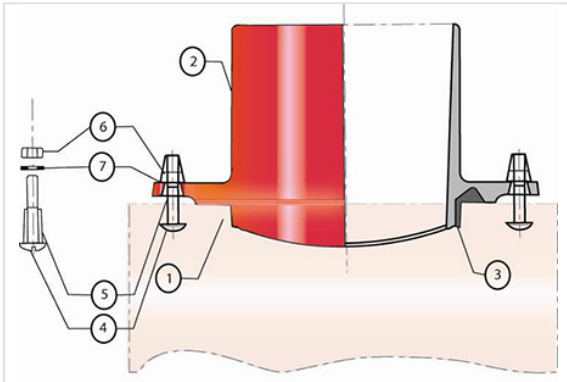

Item	Designation	Material	Coating
1	INTEGRAL pipe	Ductile Iron	
2	90° Saddle Branch	Ductile Iron	Red-brown Epoxy powder
3	Gasket	NBR	
4	Screw M10X70	Stainless Steel	
5	Plastic Jackets	TPE	
6	Nuts M10	Stainless Steel	Dacromet 500
7	Washers M10	Stainless Steel	

[Bolt set for saddle branches](#)

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.