


Tee INTEGRAL with 2 sockets STANDARD

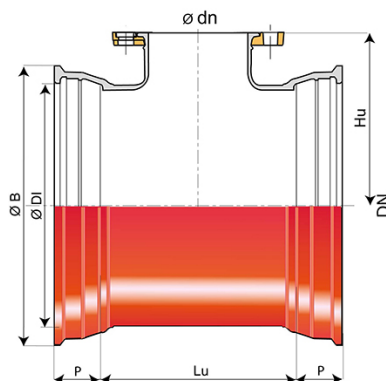

							PN 10		PN 16		PN 25	
DN (mm)	Ødn (mm)	Lu (mm)	Hu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References	Mass (kg)	References	Mass (kg)	References
1100	600	822.5	885	150	1155	1298	907.00	SSC11UD1RFF	965.00	SSC11UD2RFF		
1200	200	855	880	195	1263	1412	949.00	SSC12UD1KFF	949.00	SSC12UD2KFF	950.00	SSC12UD3KFF
1200	300	855	838	195	1263	1412	927.00	SSC12UD1MFF	927.00	SSC12UD2MFF		
1200	400	855	835	195	1263	1412	938.00	SSC12UD1NFF	943.00	SSC12UD2NFF		
1200	600	855	885	195	1263	1412	952.00	SSC12UD1RFF	977.00	SSC12UD2RFF		
1200	1200	1480	950	195	1263	1412	1587.00	SSC12TD1BFF				
1400	600	1010	980	255	1467	1600	1542.00	SSC14UD1RFF	1567.00	SSC14UD2RFF	1567.75	SSC14UD3RFF
1500	600	1110	980	280	1570	1742	1790.00	SSC15UD1RFF				
1600	300	1050	1050	275	1673	1820	1977.00	SSC16UD1MFF	1967.00	SSC16UD2MFF		
1600	500	1050	1075	275	1673	1820	1989.00	SSC16UD1QFF	2014.00	SSC16UD2QFF		
1600	600	1050	1090	275	1673	1820	1997.00	SSC16UD1RFF				


Field of use:

- Separate sewer system and combined sewer system
- Application: gravity flow and rising main sewerage systems
- Type of effluent: domestic wastewater and rainwater
- For networks with rising main under pressure
- For effluents between pH1 and pH13


Main characteristics:

- External and internal coating: red epoxy powder 250µm (PECR)
- Type of joint: Standard
- Standard Gasket in Nitrile
- EN 598 / CE Marking
- Declaration of performances [DoP-INTEGRAL005EN](#)
- Mark NF
- Designed according to the regulatory texts:
 - NF EN 476: general prescriptions for components used in the networks
 - NF EN 752: Conception of sewage projects
 - NF EN 1610: Reception of the works
 - CCTG: Fascicule 70 (sewage work)

Linked products

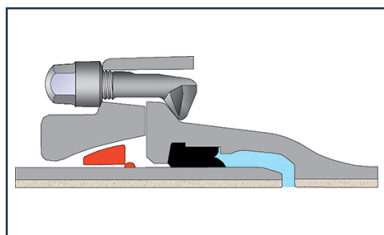

STD Ve joint for
INTEGRAL STD Fittings

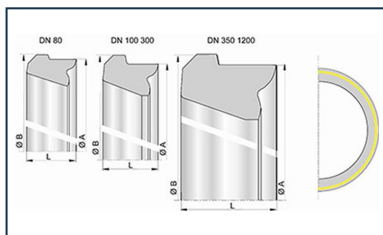

Nitrile STD Gasket
DN80-2000

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.