


Tee NATURAL with 3 sockets EXPRESS

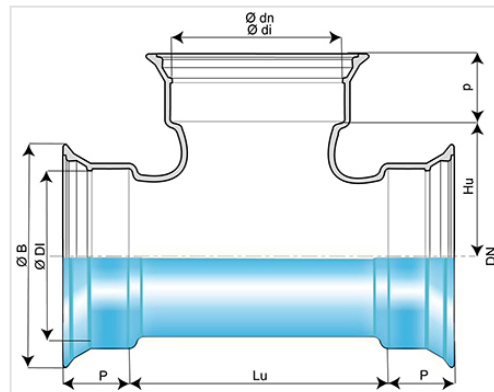

DN (mm)	Ødn (mm)	Lu (mm)	P (mm)	ØDi (mm)	ØB (mm)	Hu (mm)	p (mm)	Ødi (mm)	Mass (kg)	References
60	60	154	76	80.3	143.5	77	76	80.3	9.50	NEA60TE0CNN2
80	80	183	79	101.4	167.5	91.5	79	101.4	13.00	NEA80TE0ENN2
100	100	210	80	121.4	187.5	105	80	121.4	14.80	NEB10TE0FNN2
125	125	267	83	147.4	214.5	133.5	83	147.4	21.50	NEB12TE0GNN2
150	60	154	86	173.4	241.5	112	76	80.3	19.00	NEB15TE0CNN2
150	80	165	86	173.4	241.5	136.5	79	101.4	20.50	NEB15TE0ENN2
150	100	190	86	173.4	241.5	140	80	121.4	22.00	NEB15TE0FNN2
150	150	305	86	173.4	241.5	152.5	86	173.4	26.50	NEB15TE0JNN2
200	80	170	92	225.5	294.5	166.5	79	101.4	27.00	NEB20TE0ENN2
200	100	195	92	225.5	294.5	170	80	121.4	29.00	NEB20TE0FNN2
200	150	250	92	225.5	294.5	177.5	86	173.4	34.00	NEB20TE0JNN2
200	200	360	92	225.5	294.5	180	92	225.5	42.00	NEB20TE0KNN2


Field of use:

- For drinking water networks
- The scope of use of Aquacoat® fittings in soils is equivalent to that of Natural Biozinalium® pipes, it is suitable for the majority of soils, as defined in appendix D.2.2 of standard EN545:2010. exception :
 - peaty and acidic soils
 - soils containing waste, ashes, slag or contaminated by certain waste or industrial effluents
 - soils located below the level of the marine water table having a resistivity less than 500 Ω cm
- In such soils, or in other aggressive environments, or in the event of stray currents, it is recommended to use other, more suitable types of coatings.


Main characteristics:

- Inside-Outside coating: Aquacoat fittings (AQB) without Bisphenol
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products

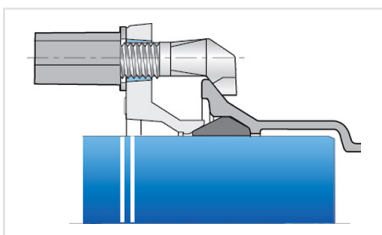

Kit Express Fittings AQB +
Express Gasket

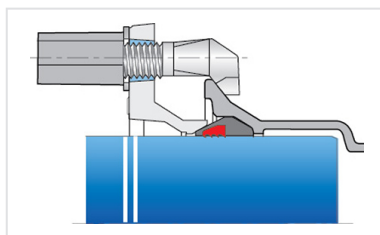

Kit Express Fitting AQB +
Express Vi Gasket

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.